

SPECIFICATION:







Operating Current (Nom.): 1.5 A
 Operating Temperature: -20°C to 70°C
 Insulation Resistance (Min.): 500 MΩ
 Dielectric Strength: 1,000 Vac

MATERIAL:

Material (Terminal): copper alloy, 3 μ" gold plating
 Material (Housing): polycarbonate
 Flammability Class: UL 94 V-2
 Material (Contact Area): copper alloy, 3 μ" gold plating

HANDLING:

Packaging: bulk

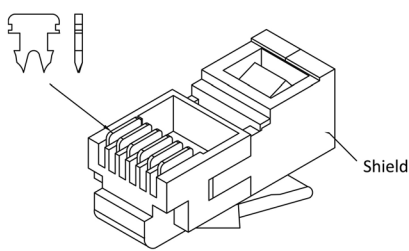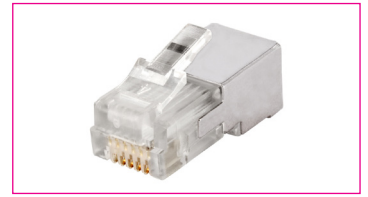

Order Information

Identifier:

MPL6/6

Modular plug 6P6C

Version:

RG

for round cable, shielded