

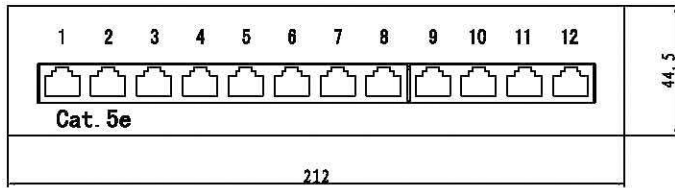


ITEM NO.	COLOR
723197	GREY
723198	BLACK

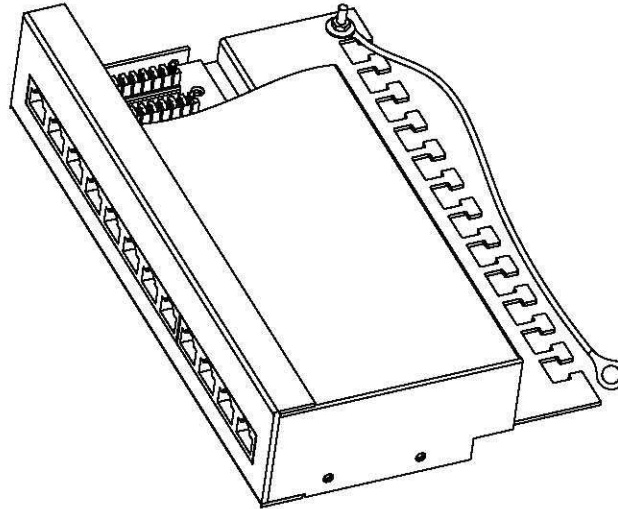



Specification:
Material:
 1. Metal frame: SPCC.
 2. Plastic Housing :ABS
 3. RJ45 contact material & finished:
 3-1. Phosphor Bronze with Nickel plated.
 3-2. Contact area : Gold plated.

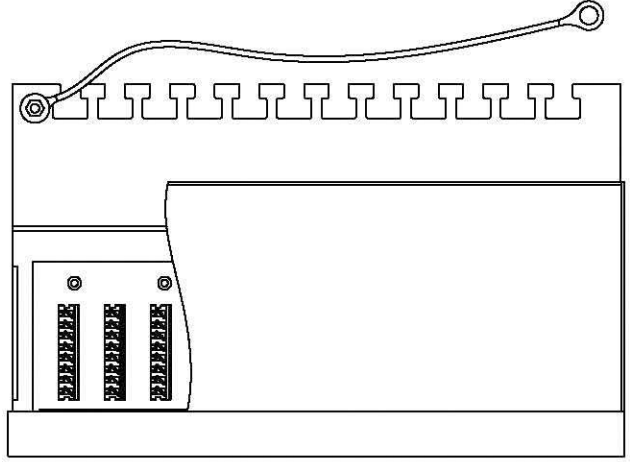

4. IDC Housing: PC
 5. IDC Terminal material & finished:
 5-1. Phosphor Bronze with Tin plated.
 5-2. Krone tool compatible.
 5-3. Suitable for 22-26 AWG stranded and solid wire.

Performance:
 a. The sticker color codes combine two wirings of T568A & T568B.
 b. Insertion Force: 900 gms for 8 contacts.
 c. Retention Strength: 7.7 kgs between Jack and Plug.
 d. Operation Temperature: -30, to 60, .
Durability:
 e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 e-2. IDC : Max. 200 punching times.
 f. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.

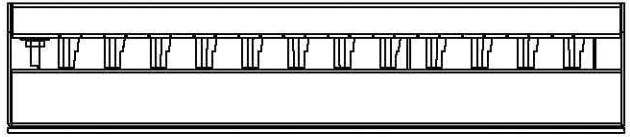

			Tolerance: X. ±0.5 .X ±0.3 .XX ±0.10	SCALE: FREE	CUSTOMER:		Approved by		
			Angle: X° ±3° .X° ±1°	UNIT: mm	 REV.: 00		CUSTOMER P/N:	COMPANY P/N:	Checked by
REV.	DESCRIPTION	DATE		SHEET	1/1	DWG. No.:	TITLE: 12 PORT PANTCH PANEL (CAT5e)		Design by XJH