
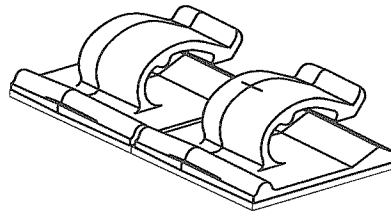



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.

| PANDUIT PART NUMBER | DIMENSIONS | | | | MAXIMUM CABLE DIA. in. (mm) | ADHESIVE BACKING | WEIGHT lbs/100 pcs (g)/100 pcs |
|---------------------|----------------|----------------|----------------|-------------------------|--------------------------------|-------------------|--------------------------------------|
| | A | B | C | D | | | |
| ACC38-A | 1.00 (25.4) | 1.00 (25.4) | 0.49 (12.4) | 0.40 (10.2) (REF) | 0.380 (9.6) | RUBBER | 0.40 (181) |
| ACC38-AT | | | | | | ACRYLIC | |
| ACC38-AV | | | | | | HIGH BOND ACRYLIC | |



TWO UP CONFIGURATION
(AS SUPPLIED TO CUSTOMER)

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

CAD FILENAME/LAYERS: G03597BB_DC_GB0239DY/00C

PANDUIT CORP.

TINLEY PARK, ILLINOIS

ACC38-A, ACC38-AT, ACC38-AV
ADHESIVE CORD CLIP

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (.5) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY
MLD

MAT'L:

SCALE

FULL

DATE
8-8-96

NYLON 6/6

DRAWING NO.

GB0239DY

DWG

A
SIZE

| | | | | | | | | | |
|-----|----------|------|-----|--|----------|-----|------|-----|--|
| 00C | 11-6-09 | TMSA | SMY | ADDED ACC38-AV PART NUMBER | GB0239DY | 00C | Kew | | |
| 00B | 6/23/08 | DJSM | | REVISED AND RE-RELEASESD TO TEAMCENTER REV HISTORY; TABULARIZED DIMS, REMOVED .45 AND .27 DIMS, REVISED .38 DIM TO INCLUDE TAPE, TIGHTENED TOLERANCES, REMOVED APPLICATION, TAPE, AND WARRANTY NOTES | GB0239DY | 00B | | | |
| I | 10/30/00 | CGSM | | CHANGED DIMS TO REF, REMOVED .03 DIM, CHANGED APPLICATION NOTE 1 | GB0239DY | I | | | |
| R | 8-8-96 | MLD | | INITIAL RELEASE | GB0239DY | R | | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | |

CHK'D
Kew