

**SPECIFICATION:**

Operating Current (Nom.): 1 A  
 Operating Temperature: -40°C to 105°C  
 Insulation Resistance (Min.): 1000 MΩ  
 Contact Resistance (Max.): 15 mΩ  
 Dielectric Strength: 500 Vac

**MATERIAL:**



Material (Terminal): brass  
 Material (Housing): PBT  
 Flammability Class: UL 94 V-0  
 Material (Contact Area): bronze, gold plated

**HANDLING:**

Packaging: tray

**TOLERANCE:**

.X: ± 0.15  
 .XX: ± 0.10

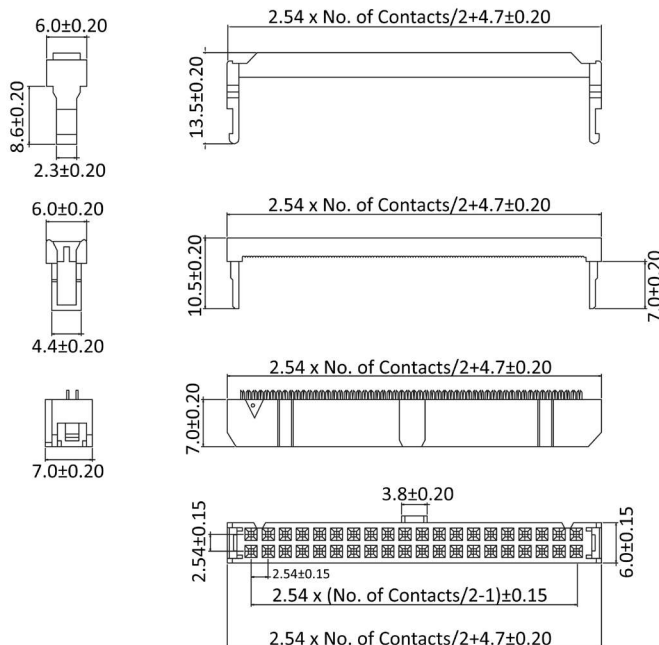

**Order Information**

Identifier:	No. of Contacts:	Colour:
PV	#	#
IDC socket pitch 2.54 mm	6: 2 x 3	empty: black
	8: 2 x 4	GR: grey
	10: 2 x 5	
	14: 2 x 7	
	16: 2 x 8	
	20: 2 x 10	
	24: 2 x 12	
	26: 2 x 13	
	34: 2 x 17	
	40: 2 x 20	
	50: 2 x 25	
	60: 2 x 30	
	64: 2 x 32	