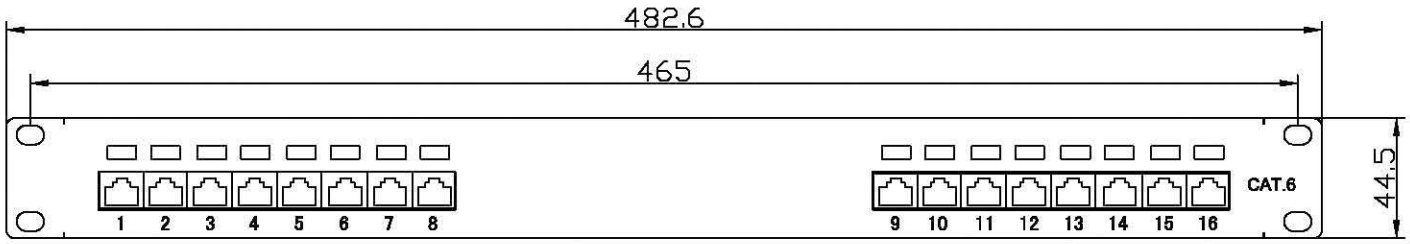



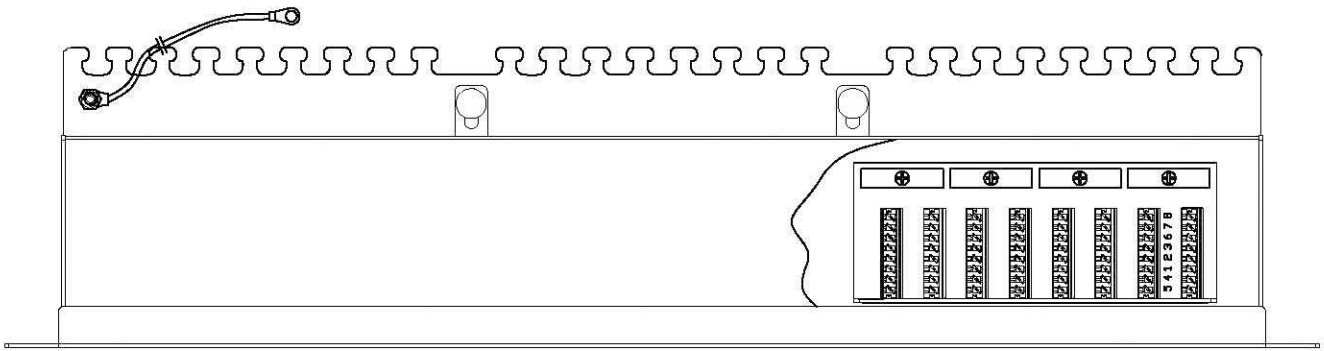

ITEM NO.	COLOR
723211	GREY
723212	BLACK

Specification:

Material:

1.Metal frame: SPCC.
2. Plastic Housing :ABS
3.RJ45 contact material & finished:
3-1.Phosphor Bronze with Nickel plated.
3-2.Contact area : Gold plated.

4.IDC Housing: PC
5.IDC Terminal material & finished:
5-1.Phosphor Bronze with Tin plated.
5-2. Krone tool compatible.
5-3. Suitable for 22-26 AWG stranded and solid wire.

Performance:

a.The sticker color codes combine two wirings of T568A & T568B.
b.Insertion Force: 900 gms for 8 contacts.
c.Retention Strength: 7.7 kgs between Jack and Plug.
d.Operation Temperature: -30° to 60° .

e.Durability:
e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
e-2. IDC : Max. 200 punching times.
f.The Cat.6 performance is in complince with the ANSI/TIA/EIA 568 C.2 standard.

REV.	DESCRIPTION	DATE

Tolerance:
X. ±0.5
.X ±0.3
.XX ±0.10

Angle:
X° ±3°
.X° ±1°

SCALE: FREE
UNIT: mm
REV.: 00

CUSTOMER:

SHEET 1/1

CUSTOMER P/N:

COMPANY P/N:

DWG. No.:

TITLE: FTP 16 port Cat6 PatchPanel

Approved by
Checked by
Design by