
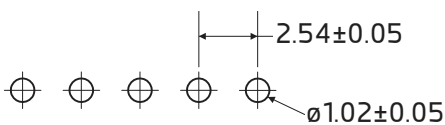

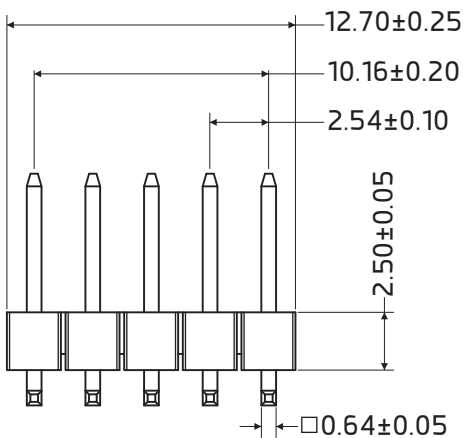


**Right Angle Pin Header, Pitch: 2.54mm,  
Single row 5 Pin, 10pcs pack**



**Specifications**

Material:  
Insulator material: Glass Fibre filled PBT  
Contact material: Brass  
Plating: Gold Flash over Nickel

Electrical:  
Current rating: 3 Amp/contact pin max.  
Contact resistance: 20mΩ/contact pin max.  
Insulation resistance: 100MΩ min. at 100V  
Withstanding voltage: 500V/AC / minute

Mechanical:  
Mechanical life cycle: 200cycles min.  
Operating temperature: -40°C to 105°C  
Soldering temperature: 260°C at 10sec. max.

Recommended PCB Board Hole Layout