


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

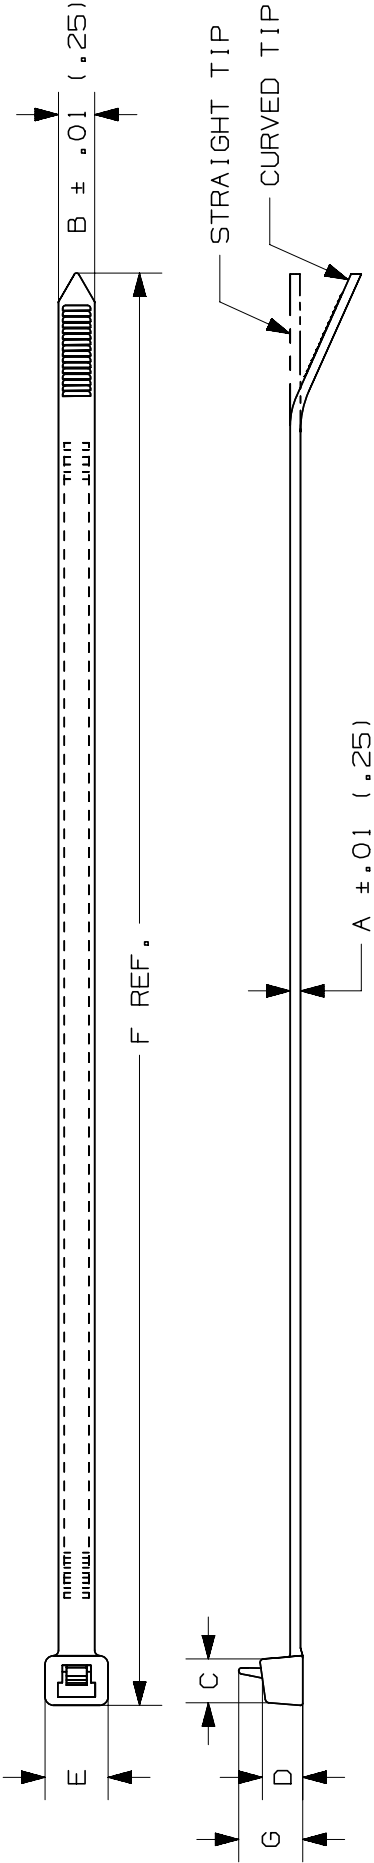


PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	4.8 (122)	.318 (8.1)	50 (222)	STANDARD	CURVED	.13 (59)
PRT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	6.3 (160)	.318 (8.1)	50 (222)	STANDARD	CURVED	.26 (119)
PRT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	7.4 (188)	.318 (8.1)	50 (222)	STANDARD	CURVED	.29 (132)
PRT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	11.5 (292)	.318 (8.1)	50 (222)	STANDARD	CURVED	.45 (205)
PRT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	14.5 (368)	.318 (8.1)	50 (222)	STANDARD	CURVED	.56 (255)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

TITLE		CUSTOMER DRAWING	
PAN-TY CABLE TIES RELEASABLE SERIES		1080150P/00	
ITEM REVISION NAME		DATASET FILE NAME	
1080150P/00		1080150P_DC_PRT/00A	
MATERIAL: NYLON 6.6			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .X ± .02 (.5) .XXX ± .020 (.51) ANGLES ±			
DRAWING NUMBER: SS-4472		THIRD ANGLE PROJECTION	
REV	DATE	BY	CHK
14	11.17.14	BDK	MPH
DESCRIPTION		ECN	SCALE
UPDATED TITLE BORDER AND UPDATED NOTES		SS-4472	NONE
DATE	BY	CHK	APR
7-31-85	HVP	7-31-85	7-31-85
SHT 1 OF 2		SIZE	
A		A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

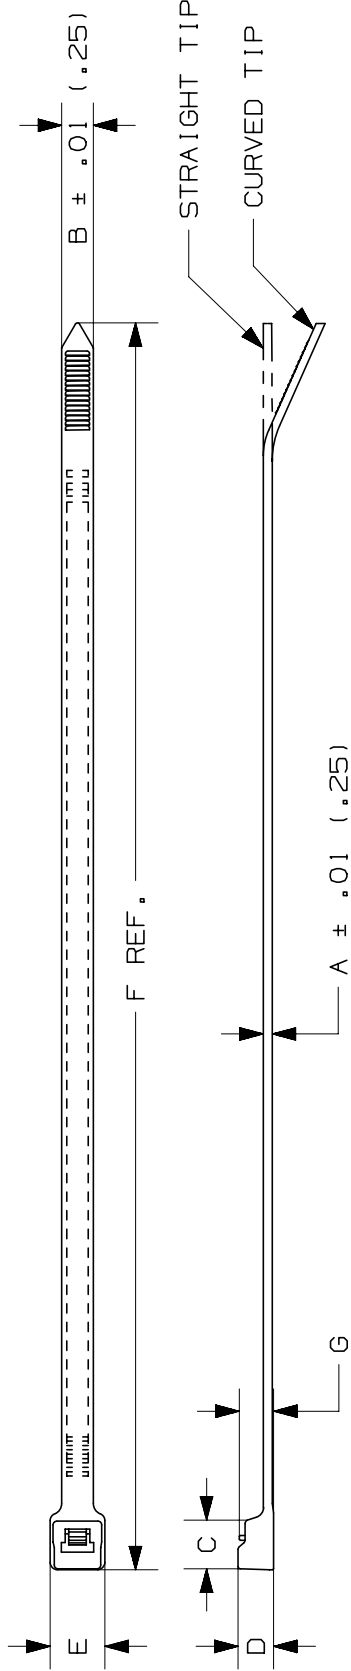

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT2H	.188 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	8.4 (213)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	.76 (346)
PRT3H	.188 (4.8)	3.00 (76)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	11.4 (290)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.04 (473)
PRT4H	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	14.5 (368)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.28 (581)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

TITLE		CUSTOMER DRAWING	
PAN-TY CABLE TIES RELEASE SALE SERIES		ITEM REVISION NAME 10B0150P/00	PANDUIT
		DATASET FILE NAME 10B0150P_DC_PRT/00A	MATERIAL: NYLON 6.6
		UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
		.X ± .02 [.5] .XXX ± .020 [.51] ANGLES ±	
		THIRD ANGLE PROJECTION	
14	11.17.14	BDK	MPH
JADE		UPDATED TITLE BORDER AND UPDATED NOTES	
REV	DATE	BY	CHK
		APR	
DESCRIPTION		ECN	SCALE
			HVP
		7-31-85	NONE
		CHK	SIZE
			A
			SHT 2 OF 2
			DRAWING NUMBER: SS-4472