


## Shape

### KSSG2308



Model Number	KSSG2308
Rated Input (W)	0.1
Maximum Input (W)	0.15
Impedance ( $\Omega$ )	$8 \pm 15\%$ @2KHz1.0V
Rated Frequency (Hz)	$1500 \pm 20\%$ @1.0V
Sound Pressure Level (dB)	$88 \pm 3\text{dB}(0.1\text{W}/10\text{cm}), 77 \pm 3\text{dB}(1\text{W}/1\text{m})$ @2.0K,2.5K,3.0K,4.0KHz
Frequency Range (Hz)	Fo--6K
Magnet (mm)	$\varnothing 6.5 \times 1.5$ Rare
Operating Temperature ( $^{\circ}\text{C}$ )	-20 ~ +55
Weight (Gram)	3.2
Material	ABS UL-94 1/16" HB

## Dimension

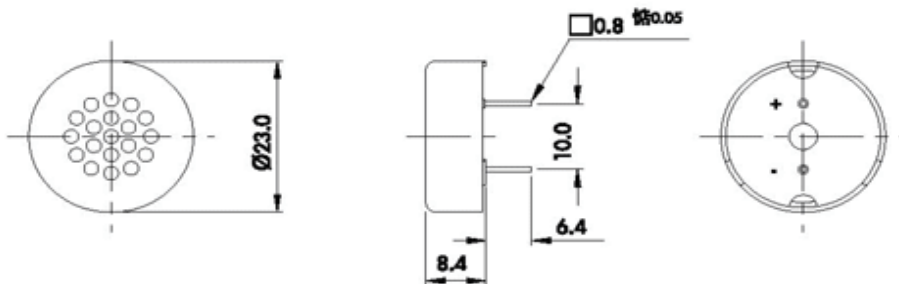

Tol :  $\pm 0.3$  Unit : mm

# Characteristic

