


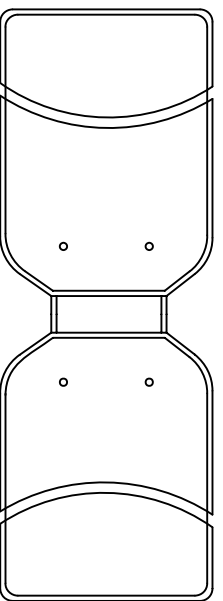




USB3.0(A)F

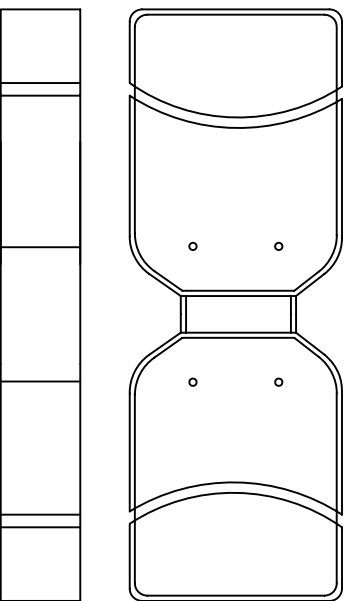

USB3.0(A)F

18.5±0.3



MOLDING BLACK COLOR

NOTE:

1. CABLE: 30AWG,UL1007.WIRE CABLE*10PCS.
2. LENGHT: 30mm*10PCS.
3. CONNECTOR: USB3.0(A)F*2PCS(BLUE INSULATION)(SHELL GOLD PLATED).
4. NOTE: CONTACTS:

USB3.0(A)F	1	2	3	4	5	6	7	8	9	64
USB3.0(A)F	1	2	3	4	5	6	7	8	9	64

SHELL
5. MOLD:MOLDING TYPE.
6. Test machine test condition.
 A.100% OPEN,SHORT&INTERMITTANCE TEST.
 B.CONDUCTOR RESISTANCE:3ohms MAX;
 C.INSULATION RESISTANCE:5M Min/,10ms:
 7. ALL MUST BE MEET ON ROHS COMPLIANT.

PACKING:1PCS/PE BAG+LABEL(),
50PCS/BIG BAG.

COMPANY	2D	ITEM NO.	AU0026	NO	B	
REVISION	DATE	DISCRPTION	DRAWN BY			SPEC
REV.A/0	2012.06.29		DESIGNED BY			
			APPROVAL BY			
						2direct GmbH
						PAGE
						1/1

SCALE

NDN

UNIT (mm)



PAGE

1/1