


Power Metal Oxide Film Resistors
Flameproof coating, UL 94 - V0
General Propose



ELECTRICAL SPECIFICATIONS						
Type		PO595-0	PO594-0	PO593-0	PO590-0	PO591-0
Style		0207	0410	0414	0617	0922
Nominal Power rating	P_{70} [W]	1		2	3	4
Resistance range	[Ω]	0R1...10M	0R1...10M	0R22...10M	0R22...560K	0R22...100K
E-Series		E24,E96		E24,E48	E24,E96	
Tolerances	[%]	$\pm 1, \pm 5$			$\pm 2, \pm 5$	
Temperature coefficient	[$10^{-6} \cdot K^{-1}$]	SEE NEXT PAGE				
Temperature range	[$^{\circ}C$]	-55...+200	-55...+235		-55...+250	
Thermal resistance	[KW^{-1}]	125	80	80	60	45
Insulation voltage (1min.) IEC115-1 clause 2.2.17	[V]			500		
PERFORMANCE DATA						
Max. working voltage IEC115-1 clause 2.2.16	[V] _{RMS}		500			750
Derating linear IEC115-1 clause 2.2.24	[$^{\circ}C$]			SEE NEXT PAGE		
Climatic category IEC68-1				55/200/56		
Failure Rate (Total, ϑ_o , max, 60% cont. lev.)	[$10^{-9} h^{-1}$]			<10		
Endurance (P_{70} 70 $^{\circ}C$, 1000h) IEC115-1 clause 4.25	[$\Delta R/R$] %		$\pm 2,0$			$\pm 1,5$
Damp heat, steady state (40 $^{\circ}C$, 93% r.h., 56d) IEC115-1 clause 4.24	[$\Delta R/R$] %		$\pm 2,0$			$\pm 1,5$
Climatic sequence IEC115-1 clause 4.23	[$\Delta R/R$] %			$\pm 1,0$		
Terminal strength	[$\Delta R/R$] %			$\pm 0,3$		
Terminal Tensile Strength	[N]			40		
Resistance to soldering heat (260 $^{\circ}C$, 3,5s) IEC115-1 clause 4.12	[$\Delta R/R$] %			$\pm 0,25$		
Solderability IEC 60068-2-20-T	[s]			2,5 Flowtime; solderglobule test		
Current noise IEC 195	[db]			R <15K: -15 R>: 15 +10 /decade		
Nonlinearity IEC 440	[db]			R <15K: 110 R> 15 K: 110 -20 /decade		
Marking			colour code, 4/5/6 bands			printed in clear

DIMENSIONS [mm]

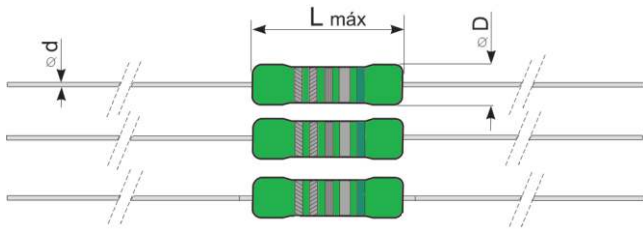


Type	L max	∅ D max	∅ d
PO595-0	6,3 ±0,5	2,4 ±0,2	0,6 -0,1
PO594-0	9,0 ±0,5	3,9 ±0,3	0,6 -0,1
PO594-0	11,5 ±1,0	4,5 ±0,5	0,8 ±0,05
PO590-0	16,5 -1,5	6,0 -0,5	0,8 ±0,05
PO591-0	20 -1	9,0 -0,5	0,8 ±0,05


TEMPERATURE COEFICIENT

PO595-0 R-Value	PO594-0 R-Value	PO593-0 R-Value	PO590-0 R-Value	PO591-0 R-Value	E-series	Tolerance	TC [10 ⁻⁶ K ⁻¹]
-----	-----	0R22 ... 10M	0R22 ... 560K	0R22 ... 100K	E 24	± 5%	± 200
0R1 ... 10M	0R1 ... 10M	-----	-----	-----	E 24	± 5%	± 100
-----	-----	1R ... 1M	1R ... 100K	1R ... 68K	E 24 / E 48	± 2%	± 200
1R ... 10M	1R ... 10M	-----	-----	-----	E 24 / E 96	± 1%	± 50


PERFORMANCE GRAPH'S

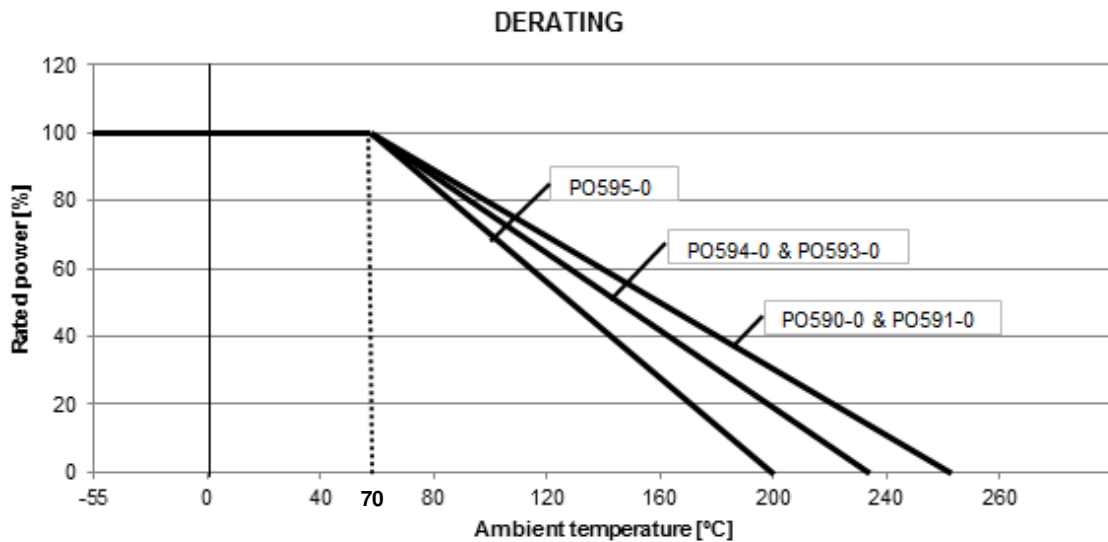


PULSE RATING $P \leq P70$ ($R \geq 10[\Omega]$)

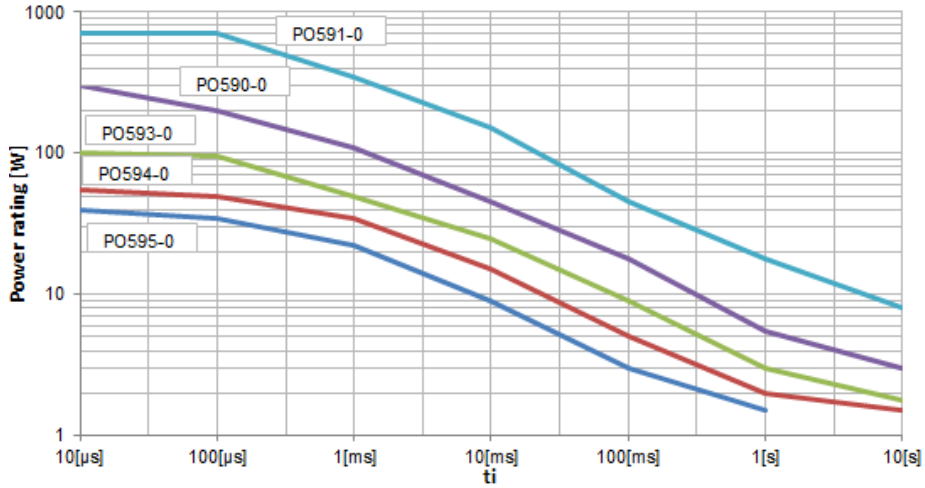

PULSE RATING $P \rightarrow 0$ ($R \geq 10[\Omega]$)

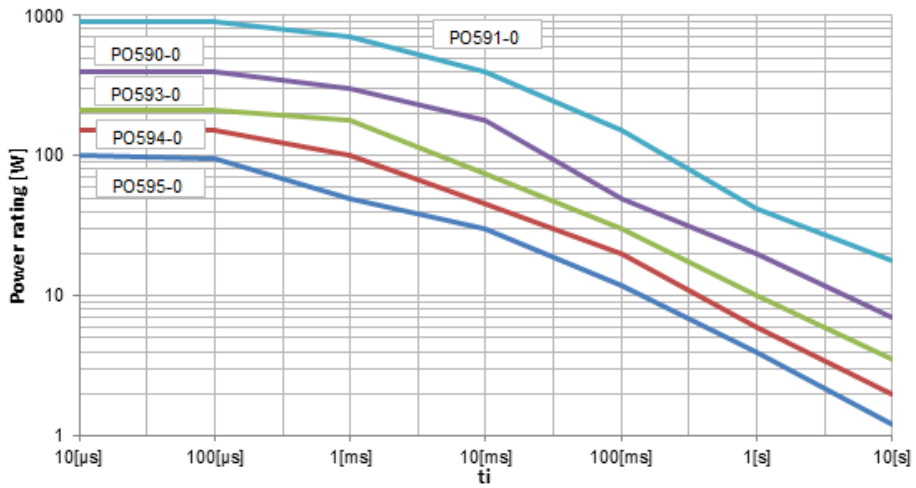


MAXIMUM PULSE VOLTAGE

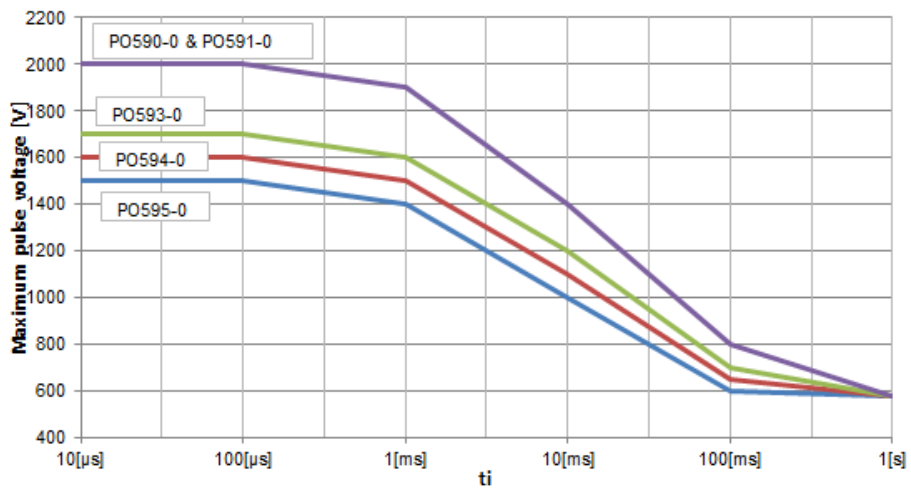

PACKAGING

The standard packaging for PO in axial type is taped, dimensions below.

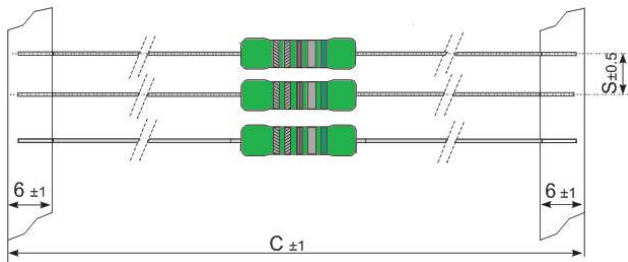

Type	Packaging	Packing style	Pieces
PO595-0	Taped/Ammopack	T	5000
PO594-0	Taped/Ammopack	T	1000
PO593-0	Taped/Ammopack	T	1000
PO590-0	Taped/Ammopack	T	1000
PO591-0	Taped/Ammopack	T	500

ALTERNATIVE LEAD CONFIGURATIONS

This type PO, is also available in a different pre-forming, as shown below, other's upon request.

SMD – Z Form	Radial	Radial Kink	Axial	Axial Kink

*For horizontal and vertical pre-forming please consult your local sales contact.

ORDERING EXAMPLE

PO595-0	5	T	150R
<i>Type</i>	<i>Tolerance</i>	<i>Pack-Code</i>	<i>R-Value</i>