



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

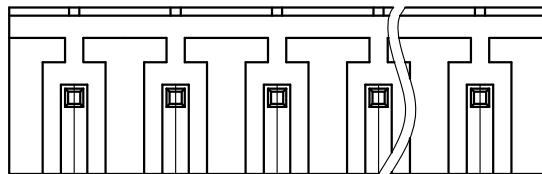

VIEW A

2EDGVC - 5.0/5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles)(Single Pitch) (Color) 1. (Grey)
 (RoHS) 2. (Blue)
 00A- (Standard) 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

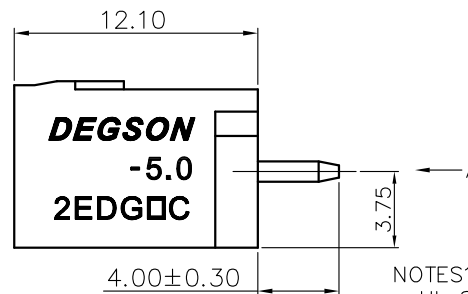

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Withstanding voltage : AC1600V/1Min.

IEC Standard




Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.0/5.08mm, Poles : N=02~24P
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						∓	∅
TO	Over	Over	Over	Over	Over	Over	0.1/10		
6	10	10	30	60	100	150			
6	10	10	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

5. RoHS Compliance

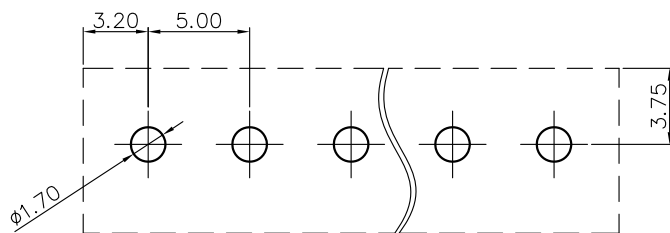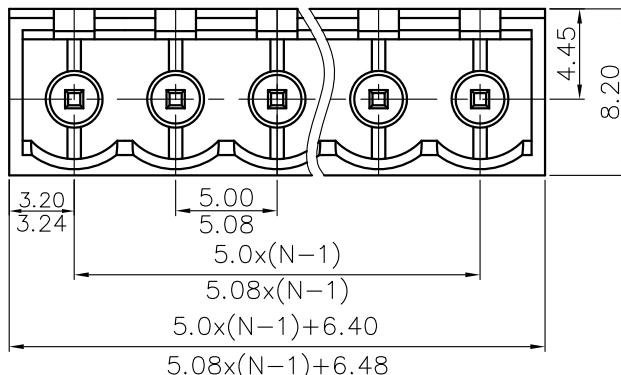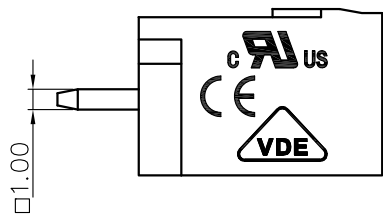

PCB LAYOUT

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/	NAME:		2EDGVC-5.0/5.08-XXP-1Y-00A(H)	
	CHKD:	/	TITLE:		CUSTOMER DRAWING	REV
	DRFT:	/	DRAWING NO.:		/	SHEET
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE	1:1