


**Contact Strips**  
Pitch 2.54 mm, straight

**Machine Pins, double row, height 7.0 mm**



**SPECIFICATION:**

Operating Voltage (Max.): 60 V  
 Operating Current (Nom.): 3 A  
 Operating Temperature: -40°C to 105°C  
 Insulation Resistance (Min.): 1000 MΩ  
 Contact Resistance (Max.): 4 mΩ  
 Dielectric Strength: 500 Vac

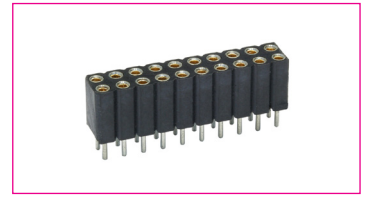

**MATERIAL:**





Material (Terminal): brass, tin plated  
 Material (Housing): PPS  
 Flammability Class: UL 94 V-0  
 Material (Contact Area): beryllium copper, gold plated

**HANDLING:**

Processing: wave soldering  
 Packaging: tube

**TOLERANCE:**

.X: ± 0.25  
 .XX: ± 0.20

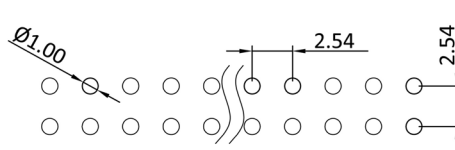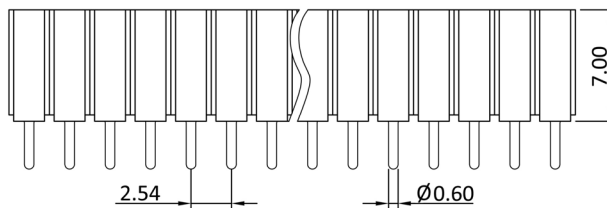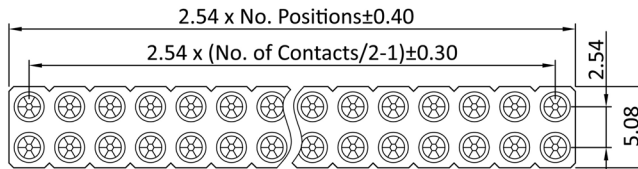

**Order Information**

Identifier:

**MP70D**

Socket connector strip pitch 2.54 mm double row height 7.0 mm

No. of Contacts:

#

4: 2 x 2

6: 2 x 3

8: 2 x 4

:

80: 2 x 40