



HDB15 M

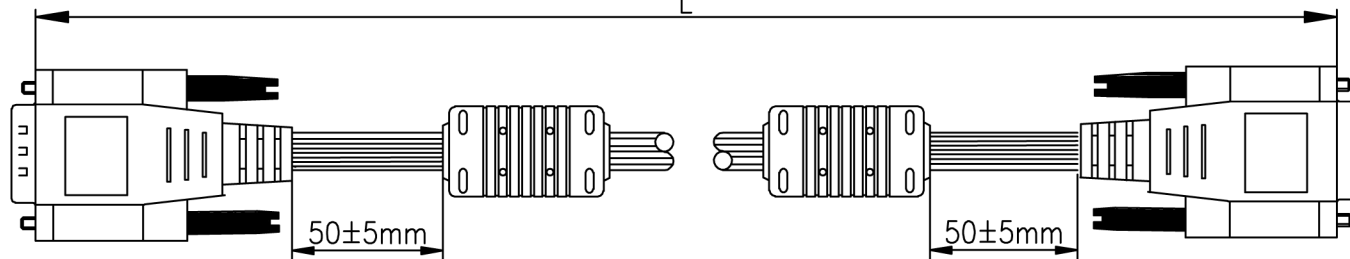

HDB15 F

**NOTES:**

**1. MATERIALS**

1.1 CABLE: [7/0.12TC\*1C+7/0.12CCS+AM+PVC]\*3COAX+(7/0.12CCS+PVC)\*7C+AM+7/0.12CCS  
+B(128/0.12ALM)+BLACK PVC JACKET

OD:8.2±0.2MM.

CABLE MARKING: E324703 AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

1.2 P1: HDB 15PIN MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY NINE PIN, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.3 P2: HDB 15PIN FEMALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.4 HOOD MOLDED BLACK PVC.

1.5 THUMB SCREW TO BE MOLDED BLACK PVC.

1.6 FERRITE TO BE MOLDED BLACK PVC.








**2 TESTING:100% OPEN AND SHORT TEST.**

**3. PACKING:1PCS/PE BAG.**

**4. ALL MATERIAL BE REACH COMPLIANT.**

**PIN OUT**

P1 ——— P2



SHELL ——— DRAIN ——— SHELL



CUSTOMER NO	L (MM)	EAN code
CV0004	1800±50	4260113560211
CV0005	3000±70	4260113560228
CV0006	5000±70	4260113560235
CV0021	15000±200	4260113563007
CV0019	10000±150	4260113563014
CV0022	20000±300	4260113563021



Printed on Cool Gray 90,  
Sintered 250°C Black  
2mm  
PVC: 80P/90A/91/92/93/94/95/96/97/98/99/100

<b>LENGTH TOLERANCE:</b> X. ± 0.5 .X ± 0.2 .XX ± 0.1	<b>SCALE:</b> FREE	<b>CUS. NAME:</b>  
<b>ANGLE TOLERANCE:</b> X° ± 3° .X° ± 1°	<b>UNIT:</b> mm	<b>VERSION:</b> 00
	<b>PAGE:</b>	1/1

<b>2direct GmbH</b>		<b>ENG:</b> XIAO	
		<b>PRODUCT NO:</b>	<b>CUSTOMER NO:</b>
<b>DRAWING NO:</b> 1035	<b>PRODUCT DESCRIPTION:</b> VGA 3+7, HDB15P M/F+FERRITE		<b>CHECKED:</b>
			<b>APPROVED:</b>

00	NEW ISSUE	2014-09-06					
REV.	MODIFY DESCRIPTION	DATE					