


0.3±0.03

- NOTE:
1. The surface of the plastic should be smooth, without flash, obvious shrinkage, defect or crack, etc.
  2. Temperature range: -25°C~85°C;
  3. Rating voltage: 50V, AC, DC;
  4. Contact resistance:  $\leq 0.03 \Omega$ ;
  5. Insulation resistance:  $\geq 500M \Omega$ ;
  6. Withstand: 500V, AC/minute.

REV.	DATE	MODIFICATION	APPROVER
Ⓐ	2008.09.20	NEW	Vicky
Ⓑ			
Ⓒ			

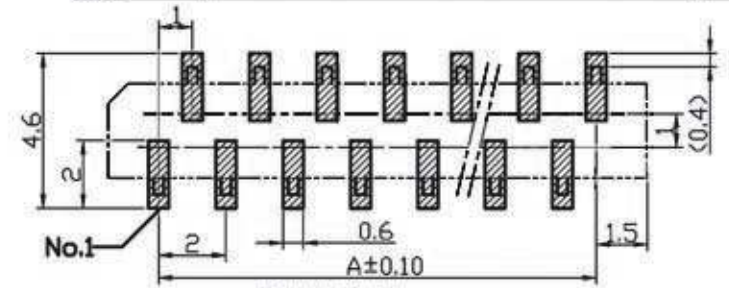

适用线路板  
RECOMMENDED PCB LAYOUT

Pin 位	Type	A	B	C	Pin 位	Type	A	B	C
4	1.0B-4PLB	3	5.1	6	24	1.0B-24PLB	23	25.1	26
5	1.0B-5PLB	4	6.1	7	25	1.0B-25PLB	24	26.1	27
6	1.0B-6PLB	5	7.1	8	26	1.0B-26PLB	25	27.1	28
7	1.0B-7PLB	6	8.1	9	27	1.0B-27PLB	26	28.1	29
8	1.0B-8PLB	7	9.1	10	28	1.0B-28PLB	27	29.1	30
9	1.0B-9PLB	8	10.1	11	29	1.0B-29PLB	28	30.1	31
10	1.0B-10PLB	9	11.1	12	30	1.0B-30PLB	29	31.1	32
11	1.0B-11PLB	10	12.1	13	31	1.0B-31PLB	30	32.1	33
12	1.0B-12PLB	11	13.1	14	32	1.0B-32PLB	31	33.1	34
13	1.0B-13PLB	12	14.1	15	33	1.0B-33PLB	32	34.1	35
14	1.0B-14PLB	13	15.1	16	34	1.0B-34PLB	33	35.1	36
15	1.0B-15PLB	14	16.1	17	35	1.0B-35PLB	34	36.1	37
16	1.0B-16PLB	15	17.1	18	36	1.0B-36PLB	35	37.1	38
17	1.0B-17PLB	16	18.1	19	37	1.0B-37PLB	36	38.1	39
18	1.0B-18PLB	17	19.1	20	38	1.0B-38PLB	37	39.1	40
19	1.0B-19PLB	18	20.1	21	39	1.0B-39PLB	38	40.1	41
20	1.0B-20PLB	19	21.1	22	40	1.0B-40PLB	39	41.1	42
21	1.0B-21PLB	20	22.1	23					
22	1.0B-22PLB	21	23.1	24					
23	1.0B-23PLB	22	24.1	25					

2	121-0100-004	端子 Contact	磷青铜 Phosphor Bronze	n x 1	电镀: 镀金厚度≥50u/MIN, 镀镍 120u/MIN.
1	121-0300-001	基座 Housing	PA9T(UL94V-0)	1	颜色

适用FPC寸法  
APPLICABLE FPC

GENERAL TOLERANCE		UNITS	NAME	ATOM TECHNOLOGY CO., LTD.		
SELECT	<input checked="" type="checkbox"/>	mm	PART NO:	ATOM01003018XXXX		
DN	TOL		APPD:	Mike		
<10	±0.20 0.05 0.15	NONE	CHKD:	Vicky		
10-30	±0.25 0.13 0.25	NONE	DR:	Ivy Wang		
>30	±0.30 0.25 0.5	NONE		DWG NO. FPC		
	0.38 1.00			SCALE SHEET REV		
ANGLE	±0.5°			1:1 1 OF 1 A		