

**Contact Strips**  
Pitch 2.54 mm, straight

Machine Pins, single row, height 7.0 mm



**SPECIFICATION:**

Operating Voltage (Max.): 60 V  
 Operating Current (Nom.): 3 A  
 Operating Temperature: -40°C to 105°C  
 Insulation Resistance (Min.): 1000 MΩ  
 Contact Resistance (Max.): 4 mΩ  
 Dielectric Strength: 500 Vac

**MATERIAL:**






Material (Terminal): brass, tin plated  
 Material (Housing): PPS  
 Flammability Class: UL 94 V-0  
 Material (Contact Area): beryllium copper, gold plated

**HANDLING:**

Processing: wave soldering  
 Packaging: tube

**TOLERANCE:**

.X: ± 0.25  
 .XX: ± 0.20

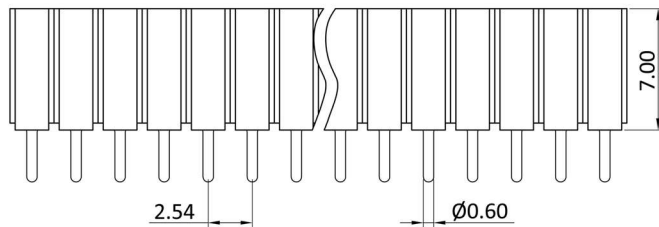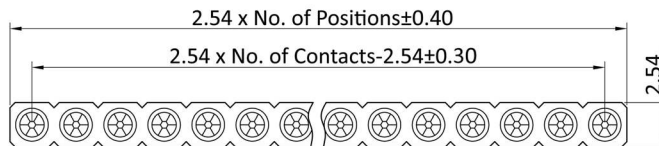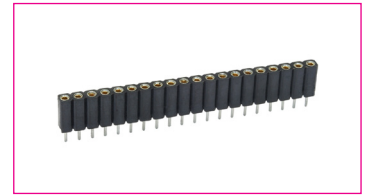

**Order Information**

Identifier:	No. of Contacts:
<b>MP70S</b>	#
Socket connector strip pitch 2.54 mm single row height 7.0 mm	2: 1 x 2
	3: 1 x 3
	4: 1 x 4
	:
	40: 1 x 40