

Board-to-Wire Connectors Pitch 2.54 mm Series CV

Connectors CV series with wires



SPECIFICATION:

Operating Voltage (Max.): 250 V
 Operating Current (Nom.): 3 A
 Operating Temperature: -25°C to 85°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 20 mΩ
 Dielectric Strength: 1,000 Vac



MATERIAL:


Material (Terminal): brass, tin plated
 Material (Housing): nylon 66
 Flammability Class: UL 94 V-2
 Material (Contact Area): brass, tin plated
 AWG: UL1007-24AWG 30 cm

HANDLING:

Packaging: bulk

TOLERANCE:

.X: ± 0.10
 .XX: ± 0.05

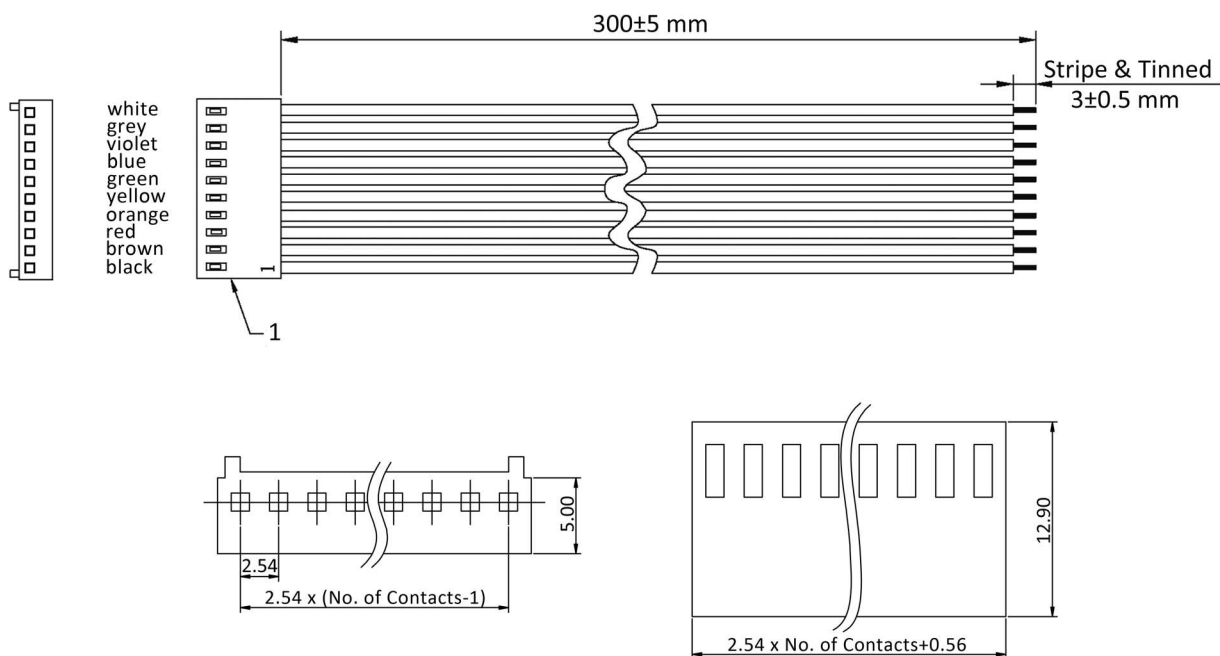

Order Information

Identifier:	No. of Contacts:
PS	#
Connector series CV pitch 2.54 mm with fixed wiring cable	2: 1 x 2
	3: 1 x 3
	4: 1 x 4
	:
	20: 1 x 20