
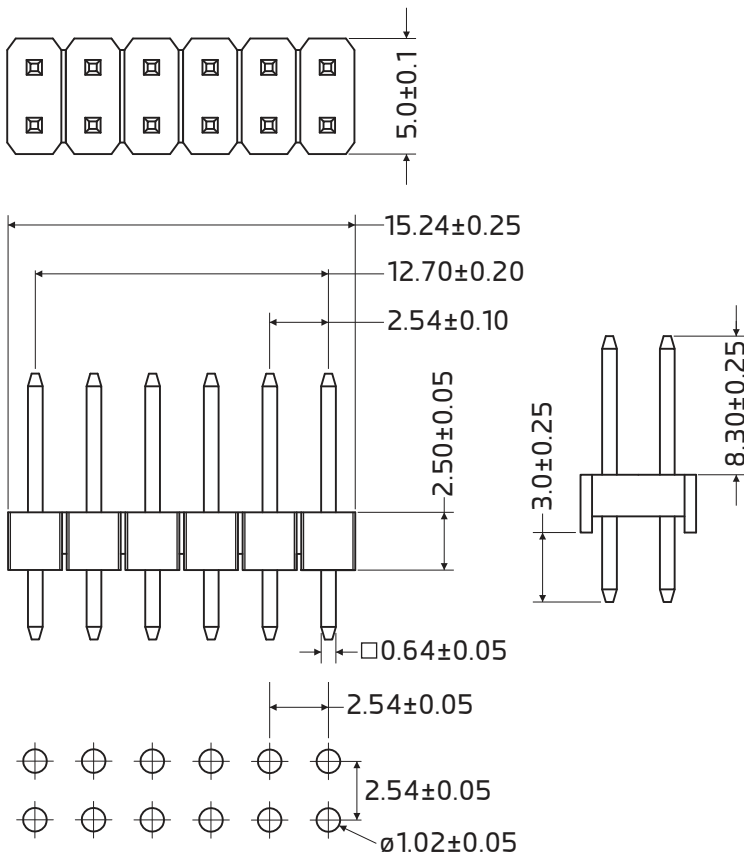


Datenblatt

Straight Pin Header, 2.54mm, Dual row, 2 x 6 pin

Straight Pin Header, Pitch: 2.54mm, Dual row 2 x 6 Pin (12 way), 5pcs pack

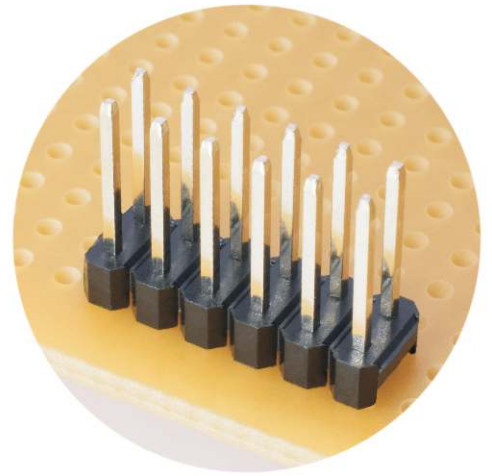

Specifications

Material:

Insulator material: Glass Fibre filled PBT

Contact material: Brass

Plating: Au/Ni 0.8 μ m Gold over 30 μ m Nickel

Electrical:

Current rating: 3 Amp/contact pin max.

Contact resistance: 20m Ω /contact pin max.

Insulation resistance: 100M Ω min. at 100V

Withstanding voltage: 500V/AC / minute

Mechanical:

Mechanical life cycle: 200cycles min.

Operating temperature: -40°C to 105°C

Soldering temperature: 260°C at 10sec. max.