




**Spezifikationen / Specifications**

Phase	2 Phase
Step Angle / Schrittwinkel	1.8° ± 5% / Step
Voltage / Nennspannung	4.2 V
Current / Nennstrom	1.5 A/Phase
Resistance / Widerstand	2.8 ± 10% Ω/Phase
Inductance / Induktanz	4.8± 20% mH/Phase
Holding Torque / Haltemoment	55 N.cm Min
Detent Torque / Rastmoment	2.8 N.cm Max
Insulation Class / Isolierungs Klasse	B
Lead Style / Kabel Art	AWG26 UL1007
Rotor Torque / Rotorträgheit	68 g.cm <sup>2</sup>

**Mechanische Abmessungen / Mechanical Dimensions**

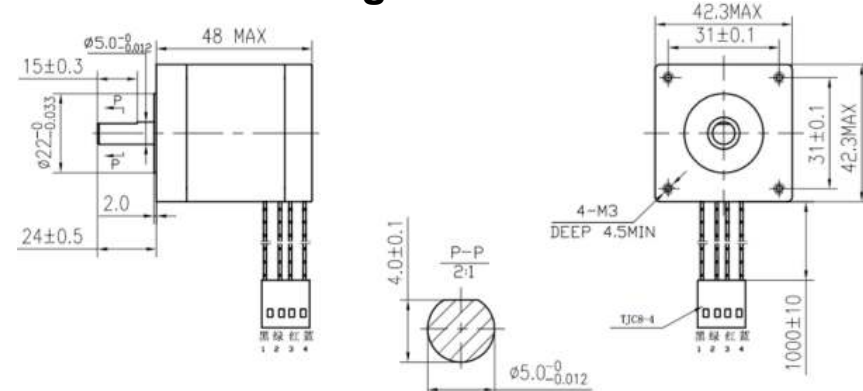

**Verbindungen / Connections**

**Drehmomentkurve / Torque Curve**

