
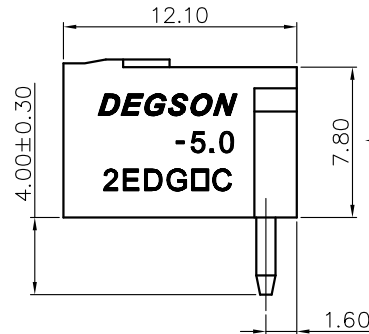
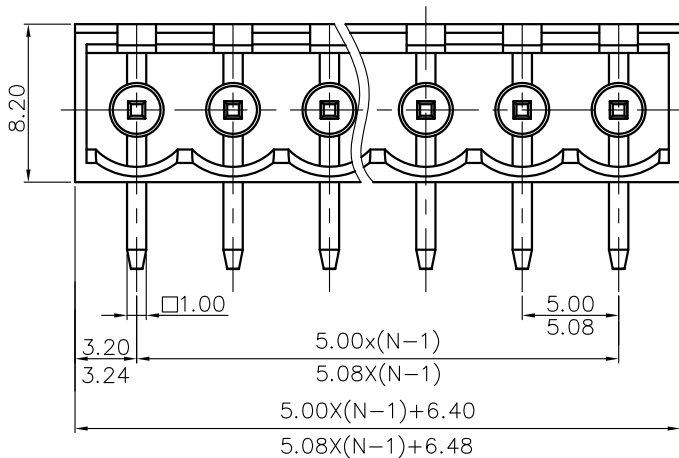


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



NOTES1:
UL Standard
1.Rated voltage/current : 300V / 15A
2.Withstanding voltage : AC1600V/1Min.


IEC Standard

Pollution degree	2
Overtoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.00/5.08mm, Poles : N=02~24P
3.Operating temperature: -40°C~+105°C
4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				±	∩	∠
TO	Over	Over	Over	Over	Over	0.1/10		
6	6 TO 10	10 TO 24	30 TO 60	60 TO 100	100 TO 150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'


5.RoHS Compliance

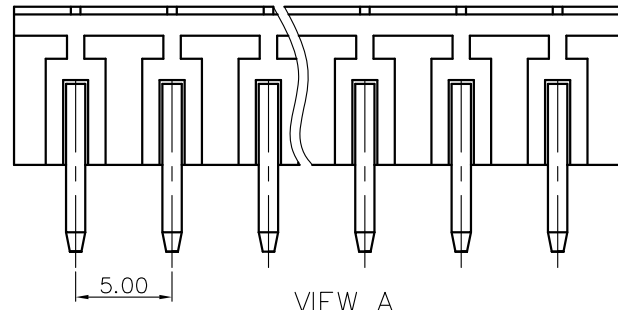

2EDGRC - 5.0/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

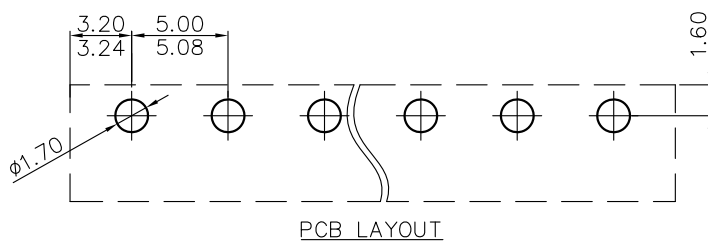

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 DEGSON NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 2EDGRC-5.0/5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV		DO	
	DRAWING NO.:		SHEET		1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE 1:1	