

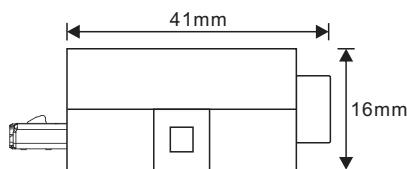


Micro USB 3.0 Male Connector modular

Item No. 2001C212

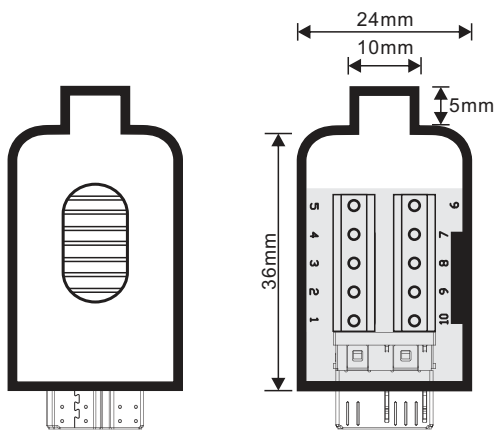

| | | | | | |
|--|------------|-----------|------------|------------|------------|
| | 1 | 2 | 3 | 4 | 5 |
| | VBUS | D- | D+ | GND | MicB_SSTX- |
| | 6 | 7 | 8 | 9 | 10 |
| | MicB_SSTX+ | GND_DRAIN | MicB_SSRX- | MicB_SSRX+ | Shield |

Note: Tx and Rx are defined from the device perspective



Screwdriver Included



Material:

Housing: PP

Insulator: PBT

Connector shell: SPCC with plated Ni 40µ min.

Contact: Brass with plated Au 1µ

Technical:

Voltage rating: 100V max.

Current rating: 1.8A max.

Contact resistance: 50mΩ max.

Insulation resistance: 1000MΩ min.

Dielectric withstanding voltage: 500V/AC(R.M.S)

Operation temperature: -40 ~85°C