
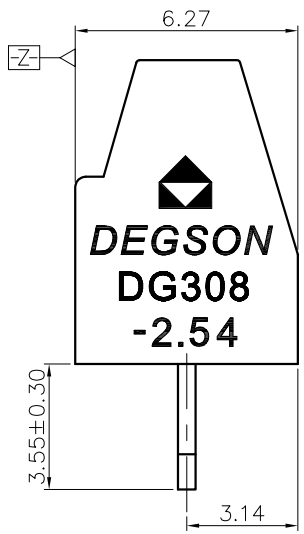
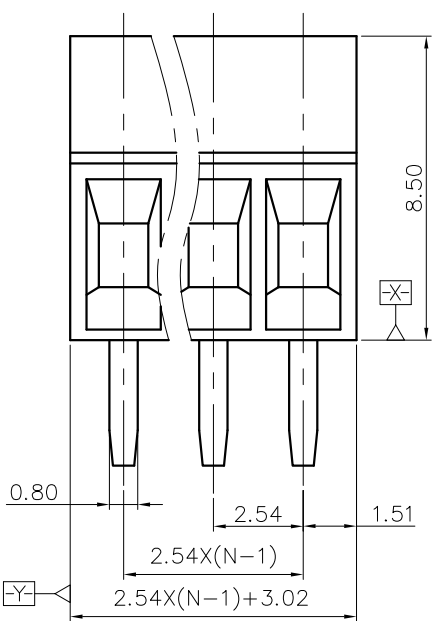
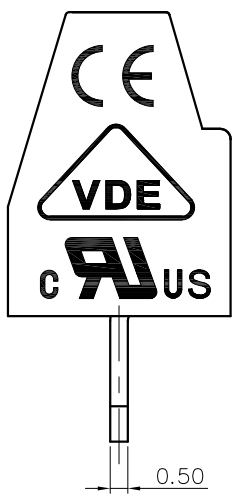


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE




NOTES1:  
 UL Standard  
 1.Rated voltage/current : 150V / 6A  
 2.Torque value : M1.6 , 1.29Lb.in  
 3.Wire range : 26~18AWG  
 IEC Standard  
 1.Rated voltage/current : 130V / 8A  
 2.Torque value : M1.6 , 0.15N·m  
 3.Wire range : 0.5~1.0mm<sup>2</sup>

NOTES2:  
 1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Pitch : 2.54mm, Poles : N=02-12P  
 3.Stripping length : 4~5mm  
 4.Withstanding voltage : AC1250V/1Min  
 5.Operating temperature: -40°C~+105°C  
 6.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				-	∩	□
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	0.1/10		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150			
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	
								±2'	

7.RoHS Compliance

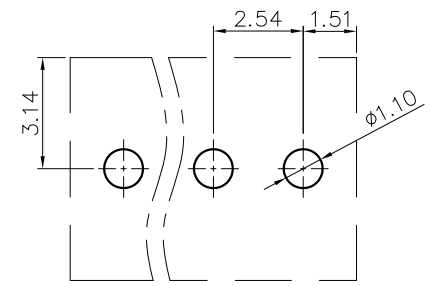

P.C.B. LAYOUT

DG308 - 2.54 - XXP - 1Y - 00A (H)  
 (RoHS)  
 00A-(Standard)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: DG308-2.54-XXP-1Y-00A(H)					
	CHKD:	DRFT: YXX 2018/07/13					
	DRFT:	TITLE: CUSTOMER DRAWING		REV	D0		
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET		1/1	
		MM (INCH)		DO NOT SCALE DRAWING		SCALE	
						1:1	