

SPECIFICATION:

Operating Current (Nom.): 1.5 A
 Operating Temperature: 0°C to 70°C
 Insulation Resistance (Min.): 500 MΩ
 Contact Resistance (Max.): 40 mΩ
 Dielectric Strength: 1,000 Vac

MATERIAL:






Material (Terminal): phosphor bronze, nickel plated and gold plated
 Material (Housing): PBT
 Flammability Class: UL 94 V-0
 Material (Shield): brass, nickel plated
 Material (Contact Area): phosphor bronze, gold plated

HANDLING:

Processing: wave soldering
 Packaging: tray

TOLERANCE:

.X: ± 0.38
 .XX: ± 0.25

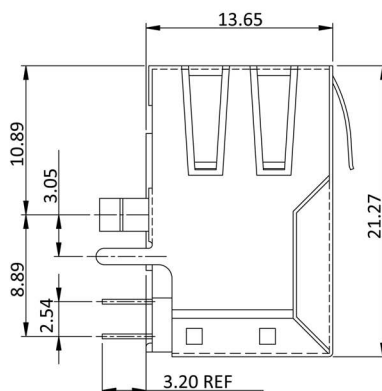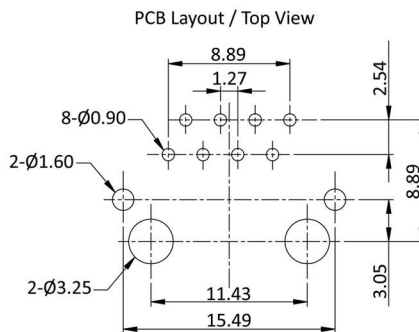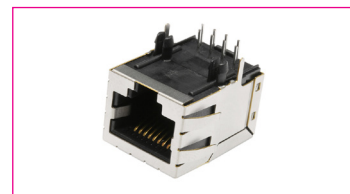

Order Information

Identifier:

MSLT45

Modular jack 8P8C shielded, pcb mount

Contact Plating:

#

A: 6 μ" gold *

B: 15 μ" gold

C: 30 μ" gold

D: 50 μ" gold

* = Standard