

**Board-to-Wire Connectors  
Pitch 3.96 mm Series CGM**

**Wafers for housing CGM single row,  
straight**



**SPECIFICATION:**






Operating Voltage (Max.): 250 V  
 Operating Current (Nom.): 5 A  
 Operating Temperature: -25°C to 85°C  
 Insulation Resistance (Min.): 1000 MΩ  
 Contact Resistance (Max.): 10 mΩ  
 Dielectric Strength: 1,500 Vac

**MATERIAL:**

Material (Terminal): brass, tin plated  
 Material (Housing): nylon 66  
 Flammability Class: UL 94 V-2  
 Material (Contact Area): brass, tin plated

**HANDLING:**

Packaging: bulk

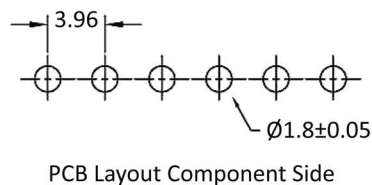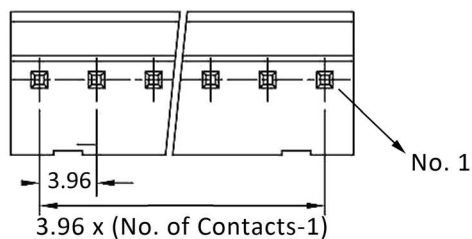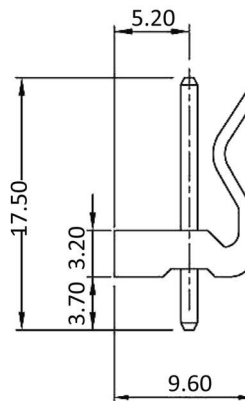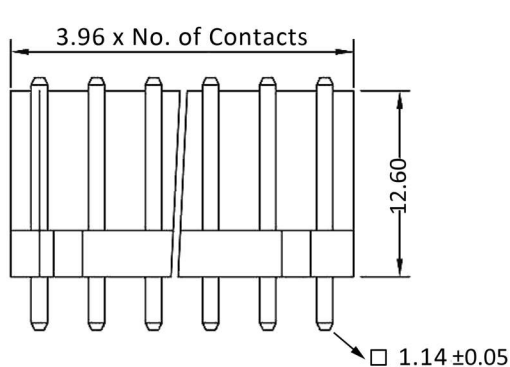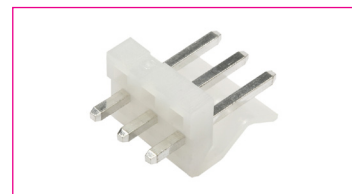

**Order Information**

Identifier:

**CGV**

Wafer series CGM pitch 3.96 mm single row straight

No. of Contacts:

**#**

2: 1 x 2

3: 1 x 3

4: 1 x 4

:

20: 1 x 20