









STANDARD & SENSITIVE 12A SCR

<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>TO-252AA (DPAK) (FS12xxxD)</p>  <p>(FULLY ISOLATED CASE)</p> <p>TO-220F (FS12xxxW)</p>  <p>TO-220AB (FS12xxxH)</p>  </div> <div style="text-align: center;"> <p>TO-263AB (D2PAK) (FS12xxxG)</p>  <p>TO-251AA (IPAK) (FS12xxxI)</p>  </div> </div> <div style="text-align: center; margin-top: 20px;">  </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">On-State Current 12 Amp</td> <td style="padding: 5px;">Gate Trigger Current 200 μA to 25mA</td> </tr> <tr> <td colspan="2" style="padding: 5px; text-align: center;">Off-State Voltage 400 V \div 800 V</td> </tr> </table> <p>FEATURES</p> <ul style="list-style-type: none"> Glass/passivated die junctions Low current SCR Low thermal resistance High surge current capability Low forward voltage drop Solder dip 260°C, 10s Component in accordance to RoHS 2011/65/EU and WEEE 2002/96/EC Meets MSL level 3, per J-STD-020, LF maximum peak of 260°C <p style="text-align: right;">   RoHS COMPLIANT </p> <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> Case: (DPAK) / (D2PAK) / (IPAK) / (TO-220F) / (TO-220AB). Epoxy meets UL 94V-0 flammability rating. Polarity: As marked on the body. Terminals: Matte tin plated leads, solderable per MIL-STD-750 Method 2026, J-STD-002 and JESD22-B102. Consumer grade, meets JESD 201 class 1A whisker test. <p>TYPICAL APPLICATIONS</p> <p>The standard gate SCR FS1208, FS1209 and FS1210 series is suitable for a wide range of applications, e.g., Overvoltage Crowbar protection, Motor Control circuits in Power Tools and domestic appliances, inrush current limiting circuits, capacitive discharge ignition and voltage regulation circuits.</p> <p>The sensitive gate SCR FS1202 series is suitable for applications where the available gate current is limited, e.g., Ground Fault Interruptors, Solid State Relays, Stand-by mode power supplies, smoke and alarm detectors.</p>	On-State Current 12 Amp	Gate Trigger Current 200 μ A to 25mA	Off-State Voltage 400 V \div 800 V	
On-State Current 12 Amp	Gate Trigger Current 200 μ A to 25mA				
Off-State Voltage 400 V \div 800 V					

Maximum Ratings and Electrical Characteristics at 25°C

SYMBOL	PARAMETER	CONDITIONS	Value	Unit
$I_{T(RMS)}$	On-state Current	180° Conduction Angle, TO-220F $T_C = 70^\circ C$ DPAK/D2PAK/IPAK/TO-220AB $T_C = 105^\circ C$	12	A
$I_{T(AV)}$	Average On-state Current	180° Conduction Angle, TO-220F $T_C = 70^\circ C$ DPAK/D2PAK/IPAK/TO-220AB $T_C = 105^\circ C$	8	A
I_{TSM}	Non-repetitive On-State Current	Half Cycle, 60 Hz	145	A
I_{TSM}	Non-repetitive On-State Current	Half Cycle, 50 Hz	140	A
I^2t	Fusing Current	$t_p = 10$ ms, Half Cycle	98	A ² s
I_{GM}	Peak Gate Current	20 μ s max.	4	A
P_{GM}	Peak Gate Dissipation	20 μ s max.	10	W
$P_{G(AV)}$	Gate Dissipation	20ms max.	1	W
T_j	Operating Temperature		(-40 to +125)	°C
T_{stg}	Storage Temperature		(-40 to +150)	°C
T_{sld}	Soldering Temperature	10s max.	260	°C
V_{RGM}	Max. Peak Reverse Gate Voltage (For FS1208, FS1209 and FS1210 only)		5	V
V_{iso}	R.M.S. isolation voltage 50/60 Hz sinusoidal waveform		2500	Vac

SYMBOL	PARAMETER	VOLTAGE			Unit
		D	M	N	
V_{DRM} V_{RRM}	Repetitive Peak Off State Voltage	400	600	800	V

STANDARD & SENSITIVE 12A SCR

Electrical Characteristics at Tamb = 25 °C

SYMBOL	PARAMETER	CONDITIONS	SG	STANDARD				Unit	
				02	08	09	10		
I _{GT}	Gate Trigger Current	V _D = 12 V _{DC}	R _L = 140Ω	MAX	200	-	-	-	μA
			R _L = 33Ω	MIN	-	0.5	2	2	mA
				MAX	-	5	15	25	mA
V _{GT}	Gate Trigger Voltage	V _D = 12 V _{DC}	R _L = 140Ω R _L = 33Ω	MAX	0.8 -	- 1.3			V
V _{GD}	Gate Non Trigger Voltage	V _D = V _{DRM} , T _j = 125°C, R _L = 3.3kΩ	R _{GK} = 220Ω Gate open	MIN	0.1 -	- 0.2			V
V _{RGM}	Reverse Gate Voltage	I _{R,G} = 10μA,		MIN	8	-			V
I _H	Holding Current	I _T = 500 mA,	R _{GK} = 1kΩ Gate open	MAX	5	-	-	-	mA
					-	15	30	40	
I _L	Latching Current	I _G = 1.2 I _{GT}	R _{GK} = 1kΩ Gate open	MAX	6	-	-	-	mA
					-	30	60	60	
dV / dt	Critical Rate of Voltage Rise	V _D = 0.67 V _{DRM} , T _j = 125 °C	R _{GK} = 220Ω Gate open	MIN	5 -	- 40	- 200	- 400	V/μs
dI / dt	Critical Rate of Current Rise	I _G = 2 x I _{GT} , tr ≤ 100 ns, f = 60 Hz, T _j = 125 °C		MIN	50				A/μs
V _{TM}	On-state Voltage	at I _T = 24 Amp, tp = 380 μs, T _j = 25 °C		MAX	1.6				V
V _{t(0)}	Threshold Voltage	T _j = 125 °C		MAX	0.85				V
r _d	Dynamic resistance	T _j = 125 °C		MAX	30				mΩ
I _{DRM} / I _{RRM}	Off-State Leakage Current	V _{DRM} = V _{RRM} , R _{GK} = 220Ω	T _j = 125 °C T _j = 25 °C	MAX	1	2			mA
				MAX	5	5			μA


Thermal resistance

SYMBOL	PARAMETER	CONDITIONS	Value	Unit
R _{th(j-c)}	Thermal Resistance Junction-Case for DC	DPAK, IPAK, D2PAK, TO-220AB	1.3	°C/W
		TO-220F	4.6	
R _{th(j-a)}	Thermal Resistance Junction-Amb for DC	S = 0.5cm ²	70	°C/W
		S = 1cm ²	45	
		IPAK	100	
		TO-220F	60	
		TO-220AB	60	

S = Copper surface under tab

STANDARD & SENSITIVE 12A SCR

Part Number Information

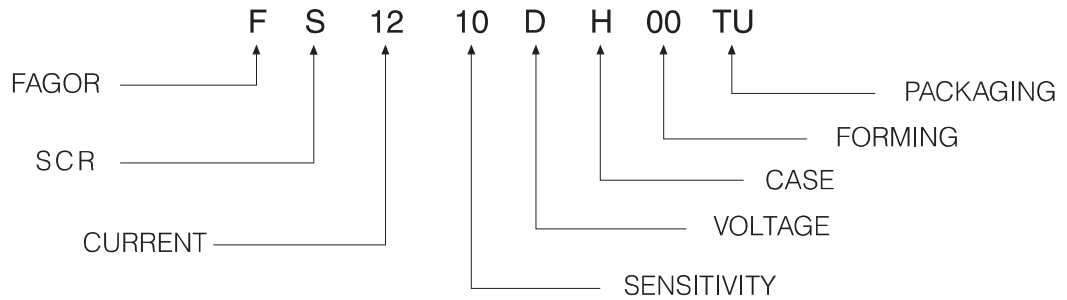

Ordering information

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FS1209DD 00TR	TR	13" diameter tape and reel	2500	0.30

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FS1209DG 00TR	TR	13" diameter tape and reel	800	1.50


PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FS1209DW 00TU	TU	TUBE	1000	2.00

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FS1209DI 00TU	TU	TUBE	4000	0.40


PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FS1209DH 00TU	TU	TUBE	1000	2.30

STANDARD & SENSITIVE 12A SCR

Package Outline Dimensions: (mm) TO-252AA (DPAK)

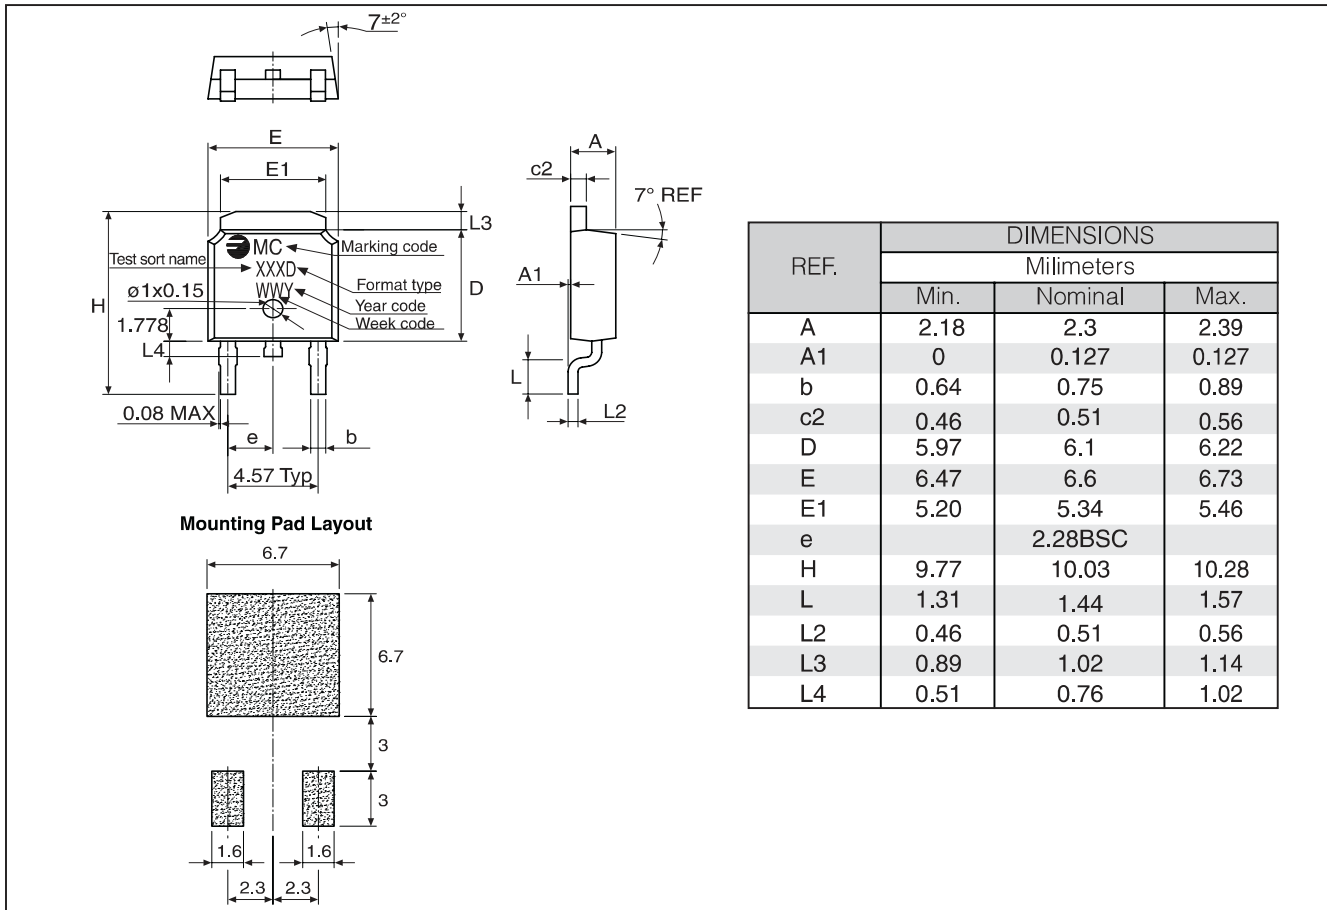


Package Outline Dimensions: (mm) TO-251AA (IPAK)

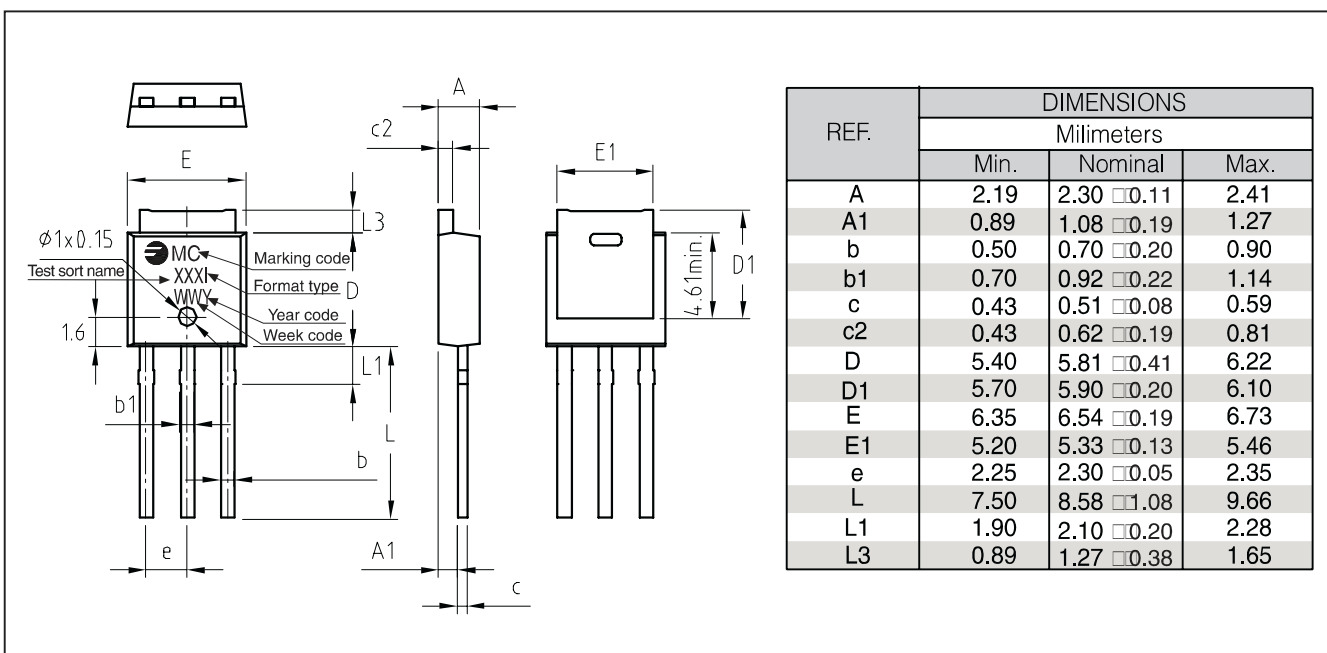


STANDARD & SENSITIVE 12A SCR

Package Outline Dimensions: (mm) TO-263AB (D2PAK)

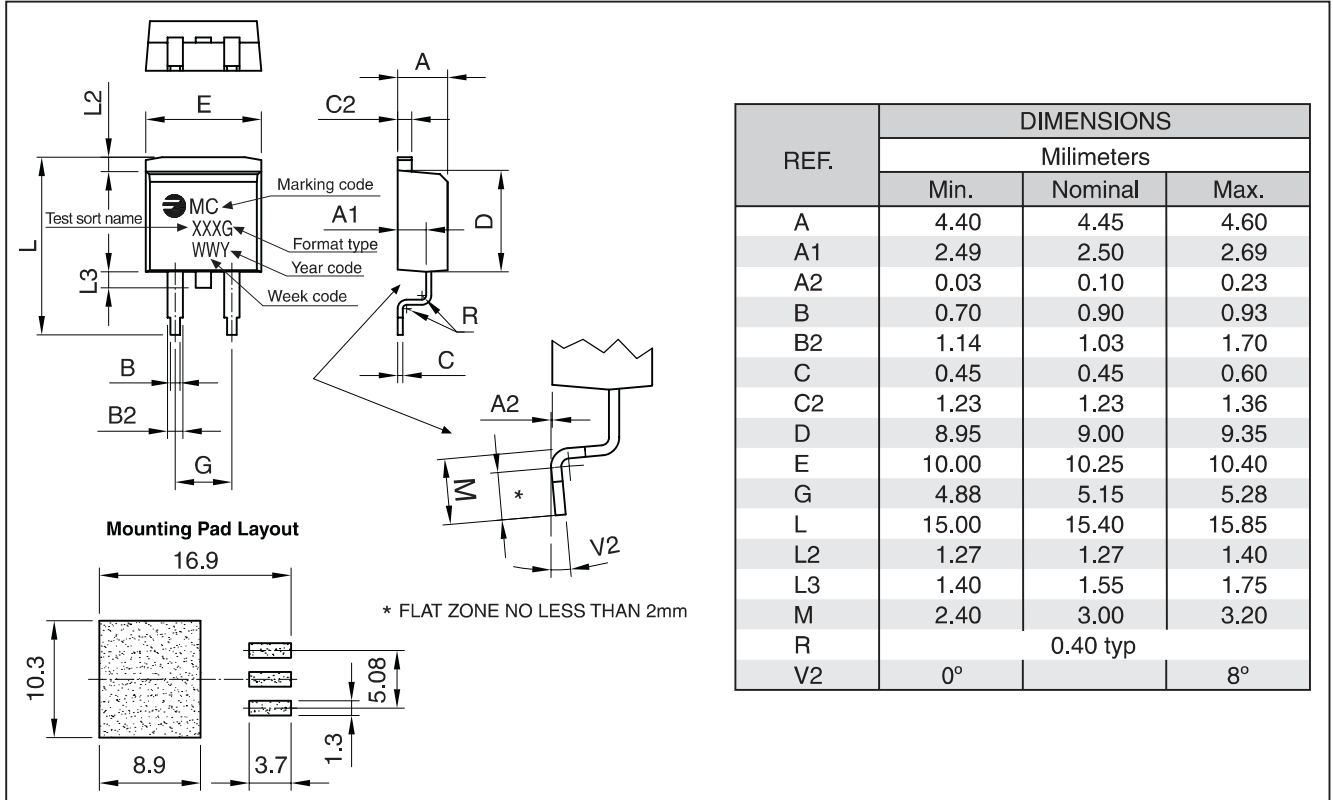


Package Outline Dimensions: (mm) TO-220F

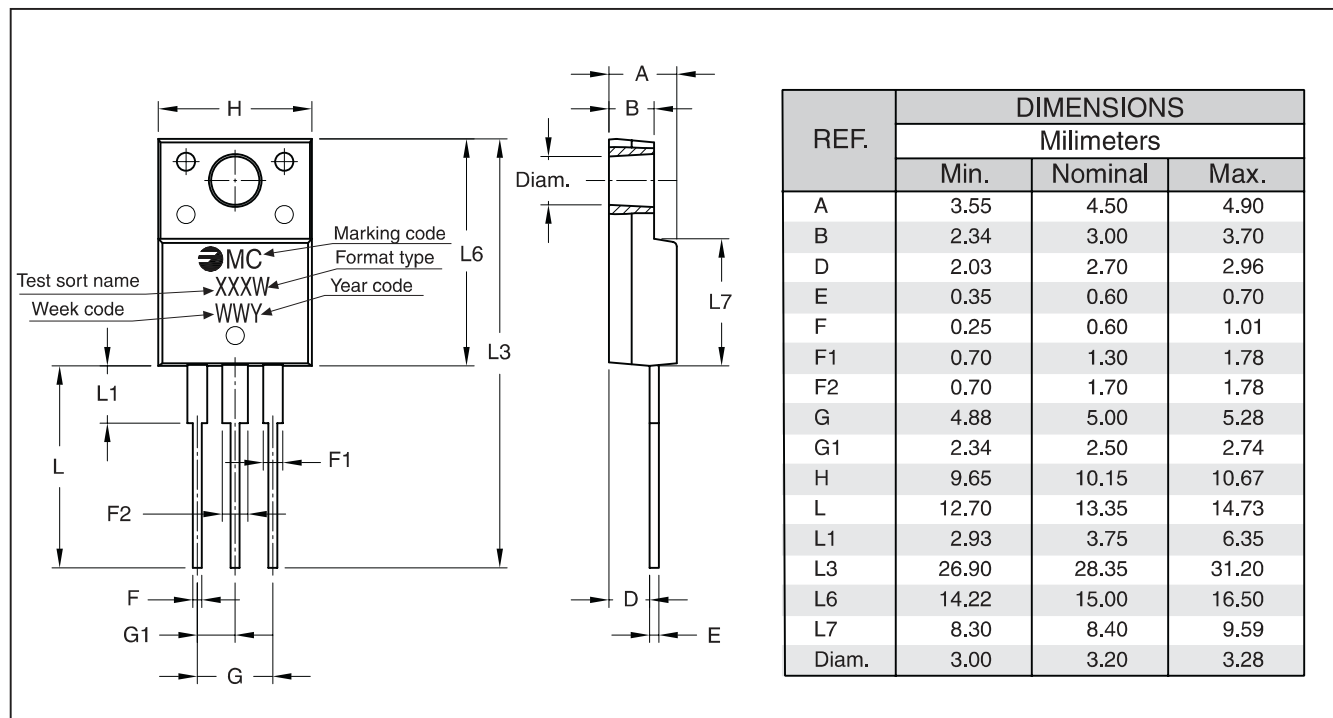

STANDARD & SENSITIVE 12A SCR

Package Outline Dimensions: (mm) TO-220AB

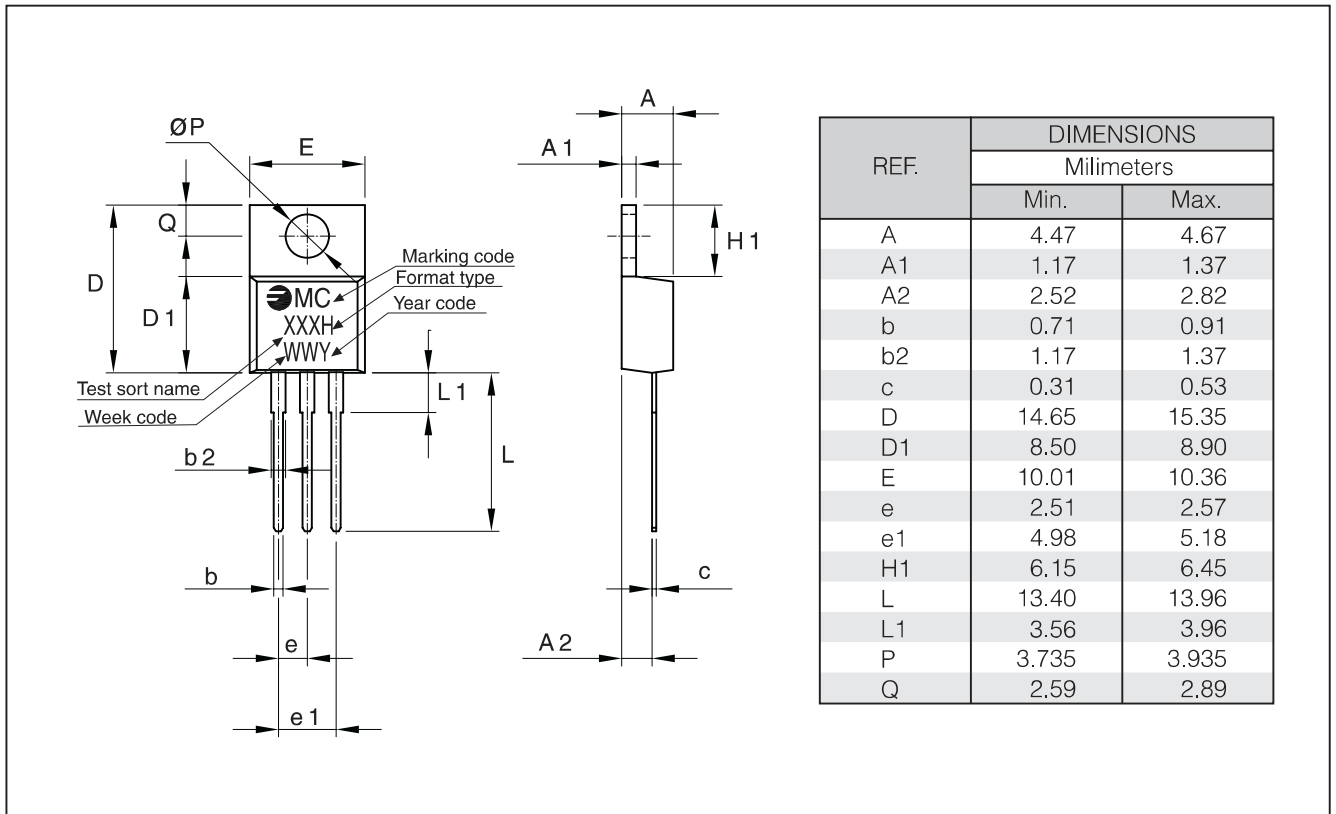

STANDARD & SENSITIVE 12A SCR

Ratings and Characteristics (Ta 25 °C unless otherwise noted)

Fig. 1: Maximum average power dissipation versus average on-state current.

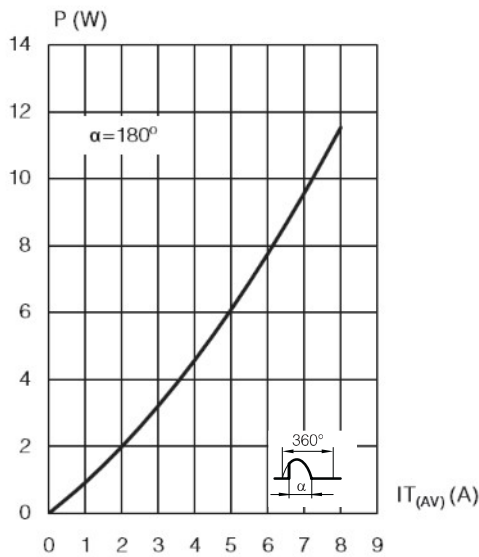


Fig. 2: Average and D.C. on-state current versus case temperature.

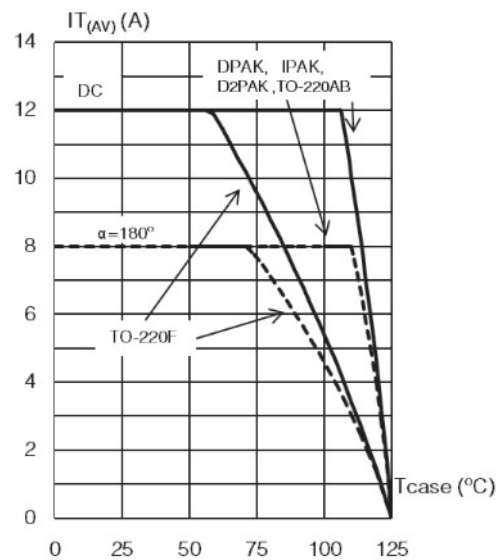


Fig. 3: Relative variation of thermal impedance junction to case versus pulse duration.


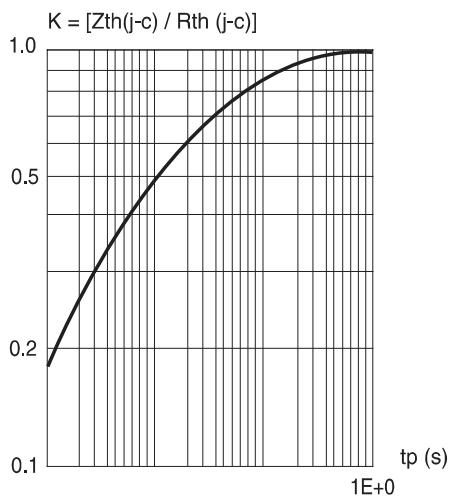


Fig. 4: Relative variation of gate trigger current, holding and latching current versus junction temperature for Sensitive Gate SCR (02).

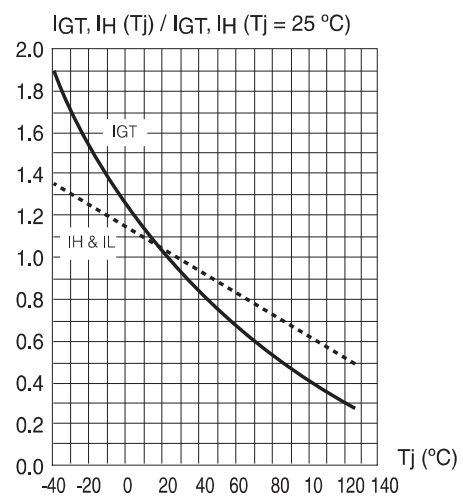

STANDARD & SENSITIVE 12A SCR

Ratings and Characteristics (Ta 25 °C unless otherwise noted)

Fig. 5: Relative variation of gate trigger current, holding and latching current versus junction temperature for Standard Gate SCRs (08,09,10).

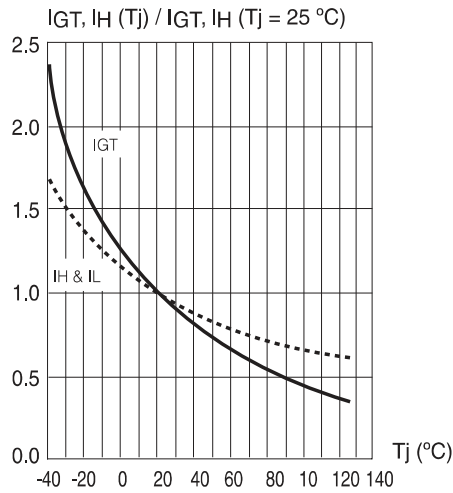


Fig. 6: Non repetitive surge peak on-state current versus number of cycles.

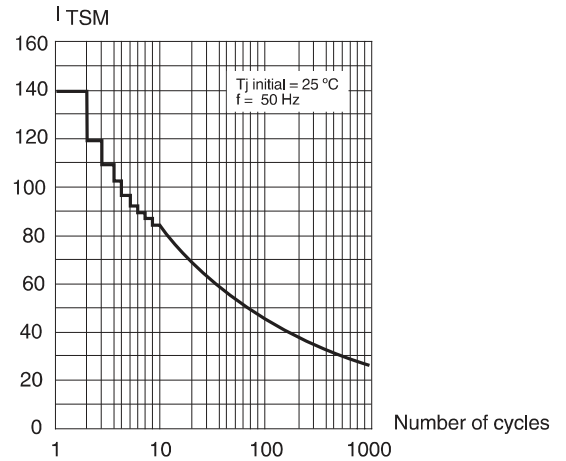


Fig. 7: Non repetitive surge peak on-state current for a sinusoidal pulse with width: tp < 10 ms, and corresponding value of I²t.


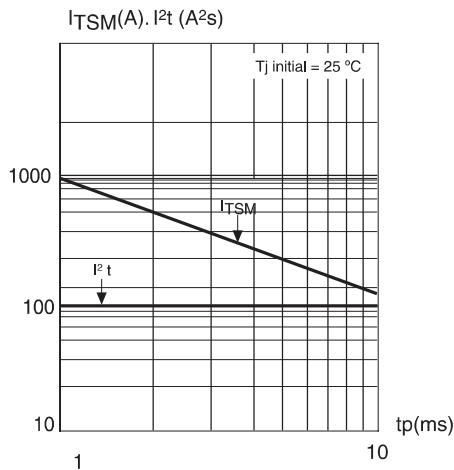


Fig. 8: On-state characteristics (maximum values).

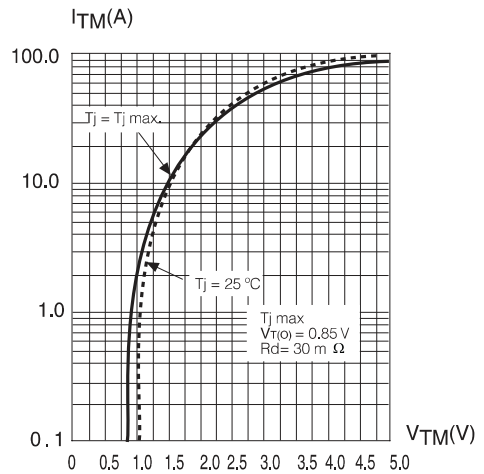

STANDARD & SENSITIVE 12A SCR

Revision History

Date	Revision	Description of Changes
14-Oct-2014	0	Original Data Sheet
16-Dec-2014	1	Modified Typical Applications Description and Title

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Fagor Electrónica, S.Coop., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Fagor"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Fagor makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Fagor disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Fagor's knowledge of typical requirements that are often placed on Fagor products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Fagor's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Fagor products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Fagor product could result in personal injury or death. Customers using or selling Fagor products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Fagor and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Fagor or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Fagor personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Fagor, Product names and markings noted herein may be trademarks of their respective owners.