

# Systemcable S/FTP CAT6 250 Mhz PIMF

Overall Shielding Alu Foil 0,025 Single -  
Braiding 80x0,12mm Aluminium - AWG24/1 CU


OD = 7,0 mm - PVC - Grey



## Technical Information:

FREQUENZ FREQUENCY	DÄMPFUNG dB/100 m ATTENUATION dB/100 m	NEXT dB	ps NEXT dB	ACR dB/100 m	ps ACR dB/100 m
1 MHz	2,0	80	75	78,0	73,0
4 MHz	3,8	74	73	70,2	69,2
10 MHz	5,8	71	70	65,2	64,2
16 MHz	7,4	70	64	62,6	56,6
20 MHz	8,4	65	61	56,6	52,6
31,25 MHz	10,6	62	60	51,4	49,4
62,50 MHz	15,4	58	58	42,6	42,6
100 MHz	19,7	50	50	30,3	30,3
155 MHz	25,0	50	50	25,0	25,0
200 MHz	29,0	50	50	21,0	21,0
250 MHz	33,0	50	50	17,0	17,0

ACR

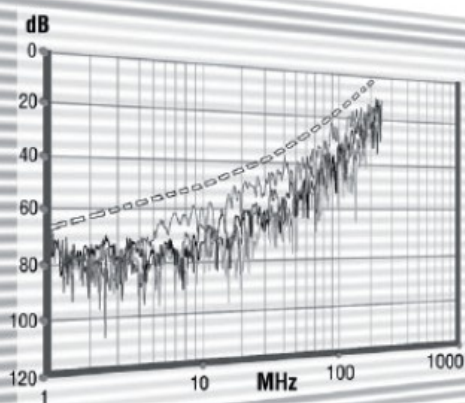

ps ACR

