

WP10-12SE 12Volt 10Ah

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

20 hour rate	(0.5A to 10.50V)	10Ah
10 hour rate	(0.95A to 10.50V)	9.5Ah
5 hour rate	(1.7A to 10.20V)	8.5Ah
1 C	(10A to 9.60V)	6.33Ah
3 C	(30A to 9.60V)	4Ah

Weight **Approx. 3.3kg(7.26Lbs.)**

Internal Resistance (at 1KHz) **Approx. 12 mΩ**

Maximum Discharge Current for

5 seconds: **150A**

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient **-5.0mv/°C/cell**

Maximum Charging Current : **3.0A**

Standby use:

Float Charging Voltage **13.50 to 13.80V**

Coefficient **-3.0mv/°C/cell**

Operating Temperature Range

Charge **-15°C (5°F) to 40°C (104°F)**

Discharge **-15°C (5°F) to 50°C (122°F)**

Storage **-15°C (5°F) to 40°C (104°F)**

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material **ABS**



(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal **F1 or F2 (Faston Tab 187 or 250)**




Dimensions


mm(inch)

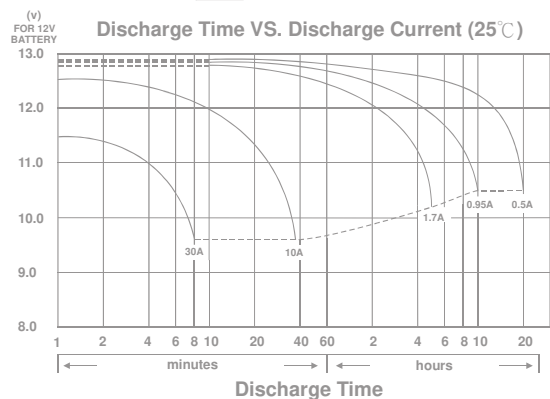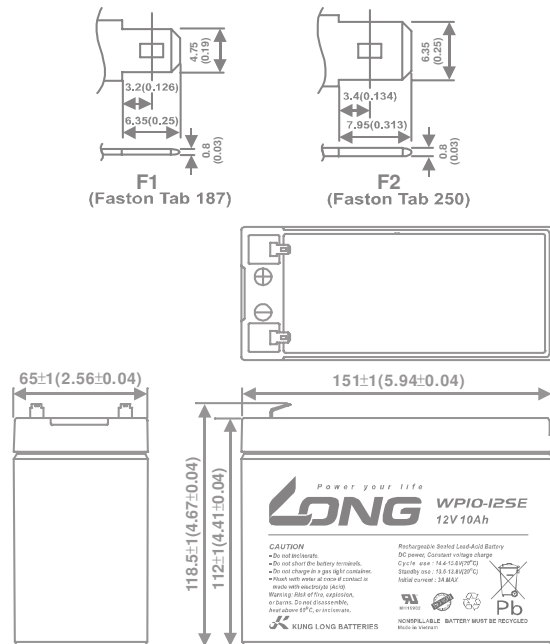


Effect of Temperature on Capacity 25°C(77°F)

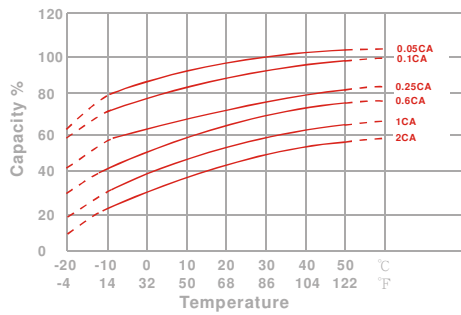


Capacity Retention Characteristic

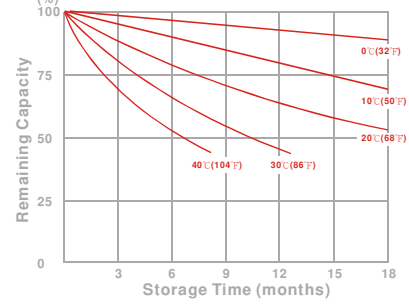

Trickle (or float) Service Life



Cycle Service Life

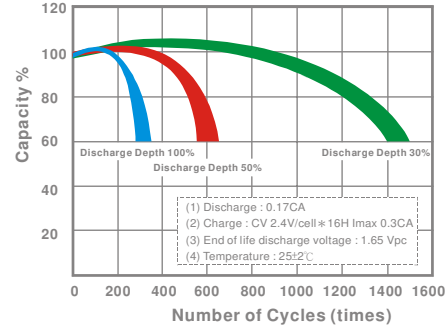

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	298	343	361	376	382	388	395
10	min	226	247	258	266	269	273	278
15	min	175	188	196	202	205	208	211
30	min	110	115	118	120	122	123	124
60	min	62.6	67.3	69.8	71.2	71.8	72.5	73.3
120	min	35.3	38.6	40.3	41.5	42.0	42.6	43.2
180	min	27.4	29.7	31.2	32.3	32.6	33.1	33.6
240	min	22.7	23.5	24.1	24.6	24.8	25.1	25.4
300	min	19.9	20.5	20.9	21.2	21.4	21.6	21.8
600	min	11.5	11.8	12.1	12.4	12.5	12.6	12.8
1200	min	6.36	6.55	6.68	6.87	6.92	6.96	7.03

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	24.6	29.3	32.7	34.1	34.9	35.6	36.1
10	min	21.4	24.1	25.6	26.7	27.1	27.6	28.3
15	min	15.6	17.2	18.4	19.1	19.5	19.9	20.4
30	min	10.7	11.3	11.8	12.2	12.4	12.6	12.8
60	min	5.69	6.03	6.26	6.45	6.58	6.63	6.69
120	min	3.24	3.39	3.48	3.56	3.59	3.62	3.67
180	min	2.55	2.63	2.68	2.72	2.74	2.76	2.79
240	min	1.96	2.01	2.05	2.08	2.09	2.11	2.12
300	min	1.69	1.72	1.74	1.76	1.77	1.78	1.79
600	min	0.974	1.00	1.02	1.04	1.05	1.06	1.07
1200	min	0.525	0.527	0.532	0.536	0.538	0.541	0.544

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)