

# Modular Einbaubuchsen Modular Jacks

MODULAR EINBAUBUCHSE PRINTMONTAGE 8P8C UNGESCHIRMT  
MODULAR JACK PCB 8P8C UNSHIELDED



Revision: 01

## SPECIFICATION

Current Rate: 1.5 AMP  
Insulation Resistance: 500 MΩ Min.  
Contact Resistance: 40 mΩ Max.  
Dielectric Voltage: 1000 V AC  
Operation Temperature: 0 °C to +80 °C

## MATERIAL

Insulator: PBT UL94V-0  
Contacts: Phosphor bronze

## FINISH


Contacts: Gold plated over nickel in contact area  
Tin plated over nickel in solder area

## HANDLING

Processing: Wave soldering  
Packing: Tray

## TOLERANCE

.XX ±0.25  
.X ±0.38

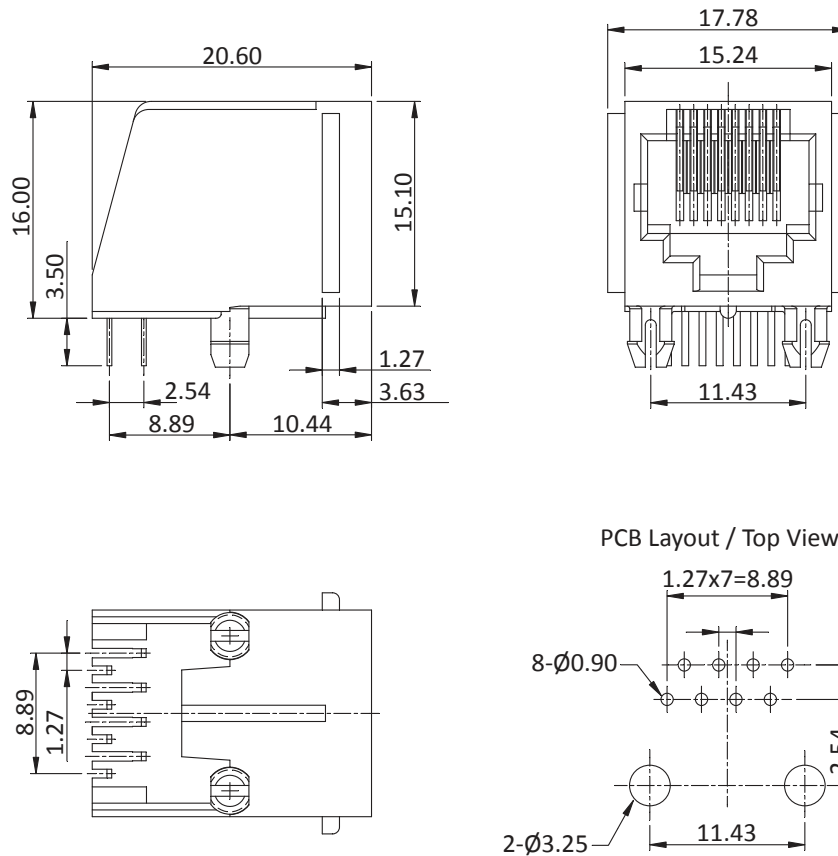

## Order Information

Series

MEB8/8P

Contact Plating

#

Modular Jack 8P8C Side Entry,  
unshielded

empty : 6µ" Gold \*  
B : 15µ" Gold  
C : 30µ" Gold  
D : 50µ" Gold

\* = Standard