






		Conditions	
cell type:	NiMH		
cell size:	AAA		
nominal voltage:	1.2 V		
max. charge voltage:	1.5 V	at standard charge (0.1C / 20°C)	
capacity			
nominal:	1000 mAh	discharge at 0.2C	
minimum:	800 mAh	discharge at 0.2C	
	750 mAh	discharge at 1C	
		1.0V end discharge voltage	
		ta: 20°C	
max. continuous discharge current:	2400 mA	ta: 0...45°C	
charge		current	time
standard charge:	100 mA	14....16hrs	
quick charge:	250 mA	4hrs	
fast charge:	1000 mA	1hr	
recommended charge termination control parameters:	0...5 mV	- ΔV (-deltaV)	
	0.8...1 °C	temperature rise per minute	
	45...50 °C	TCO (temperature cut off)	
trickle charge current:	5...25 mA	(recommended)	
continuous overcharge: (less than 1 year)	≤ 80 mA	no conspicuous deformation no leakage	
internal resistance: (impedance)	≤ 50 mΩ	at 1KHz battery fully charged	
life expectancy:	≥ 500 cycles	acc. IEC standard	
self discharge			
charge retention:	≥ 80 %	after 12 months storage at 20°C	
initial capacity:	≥ 550 mAh	within 30 days after delivery discharge at 0.2C	
ambient temperature range:	0...45 °C	standard charge	
	10...40 °C	fast charge	
	- 20...65 °C	discharge	
	- 20...50 °C	storage (≤3months)	
	- 20...40 °C	storage (≤6months)	
	- 20...30 °C	storage (≤24months)	

QCT1: 20/750/50
QCT2: 30/700/55

mechanical specifications			
cell dimensions			
diameter d1:		10.5 - 0.7	mm
diameter d2:	max.	3.8	mm
height h1:		44.5 - 1.5	mm
height h2:	min.	0.8	mm
weight:		12.5 ± 2	g

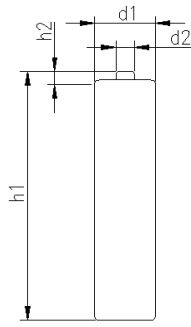

Diagrams

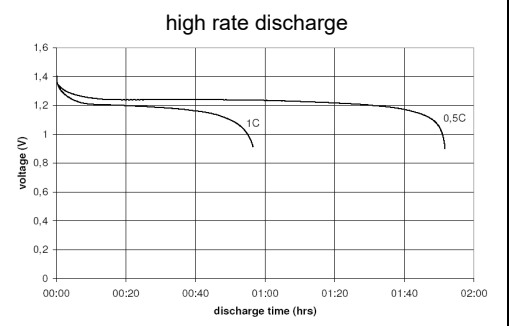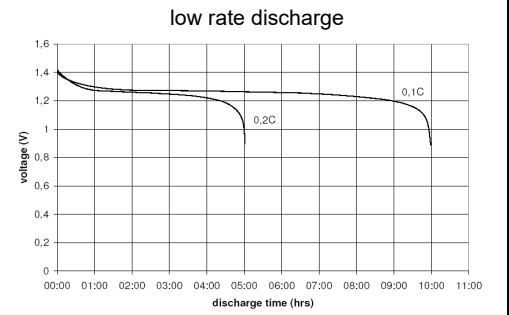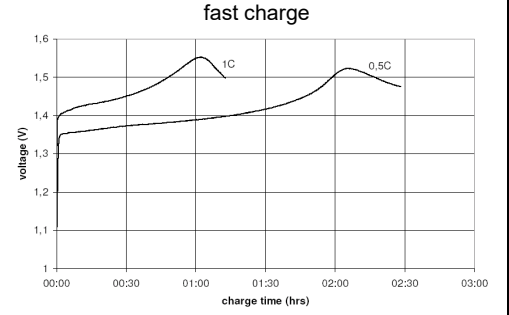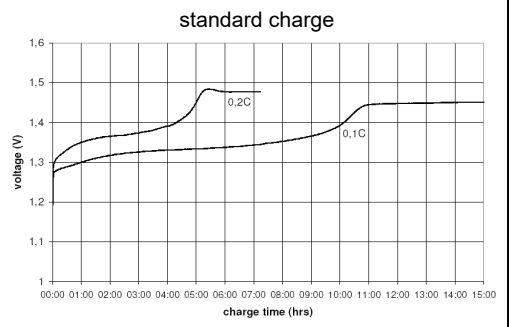

	ANSMANN Specifications for model:	NiMH Battery
		AAA - 1000mAh low self discharge
	data sheet no. / part no.	
	supplier no.	702069
author / date	TG / 22.01.2019	

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice