



## FTTH Termination Box 2 x LCD/APC with Installation Cable

### Technical Features

Fiber to the home termination box, fully assembled

Box 80 x 80 mm with 2x LCD/APC adapter

With 4-core breakout cable

Prefabricated on one side with pigtail 4x LC/APC



Flame retardant and halogen-free, B2ca-s1a, d0, a1

Compliant with EN 50575:2014+A1:2016

Art No.	Length	EAN Code
FB4LC20	20 m	4052792071665
FB4LC30	30 m	4052792071672
FB4LC40	40 m	4052792071689
FB4LC50	50 m	4052792071696
FB4LC60	60 m	4052792071702



### Technical Drawings

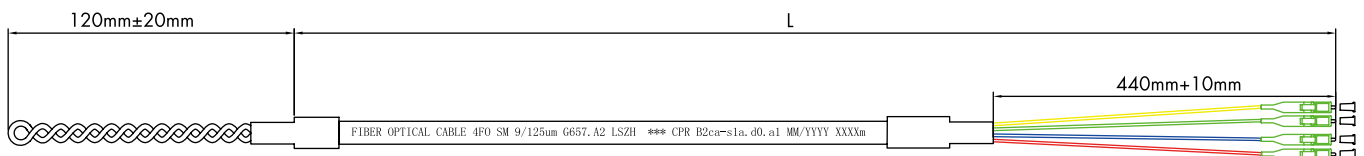

Colored Coating Fiber: 250um±15um

Inner Jacket

Polyester yarn

Outer Jacket: White 2.2mm±0.2mm

Test:


TYPE	Single-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	APC ≥60dB (IEC 61300-3-6)
Test Wavelength	1310nm

www.2direct.de



Made in China

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

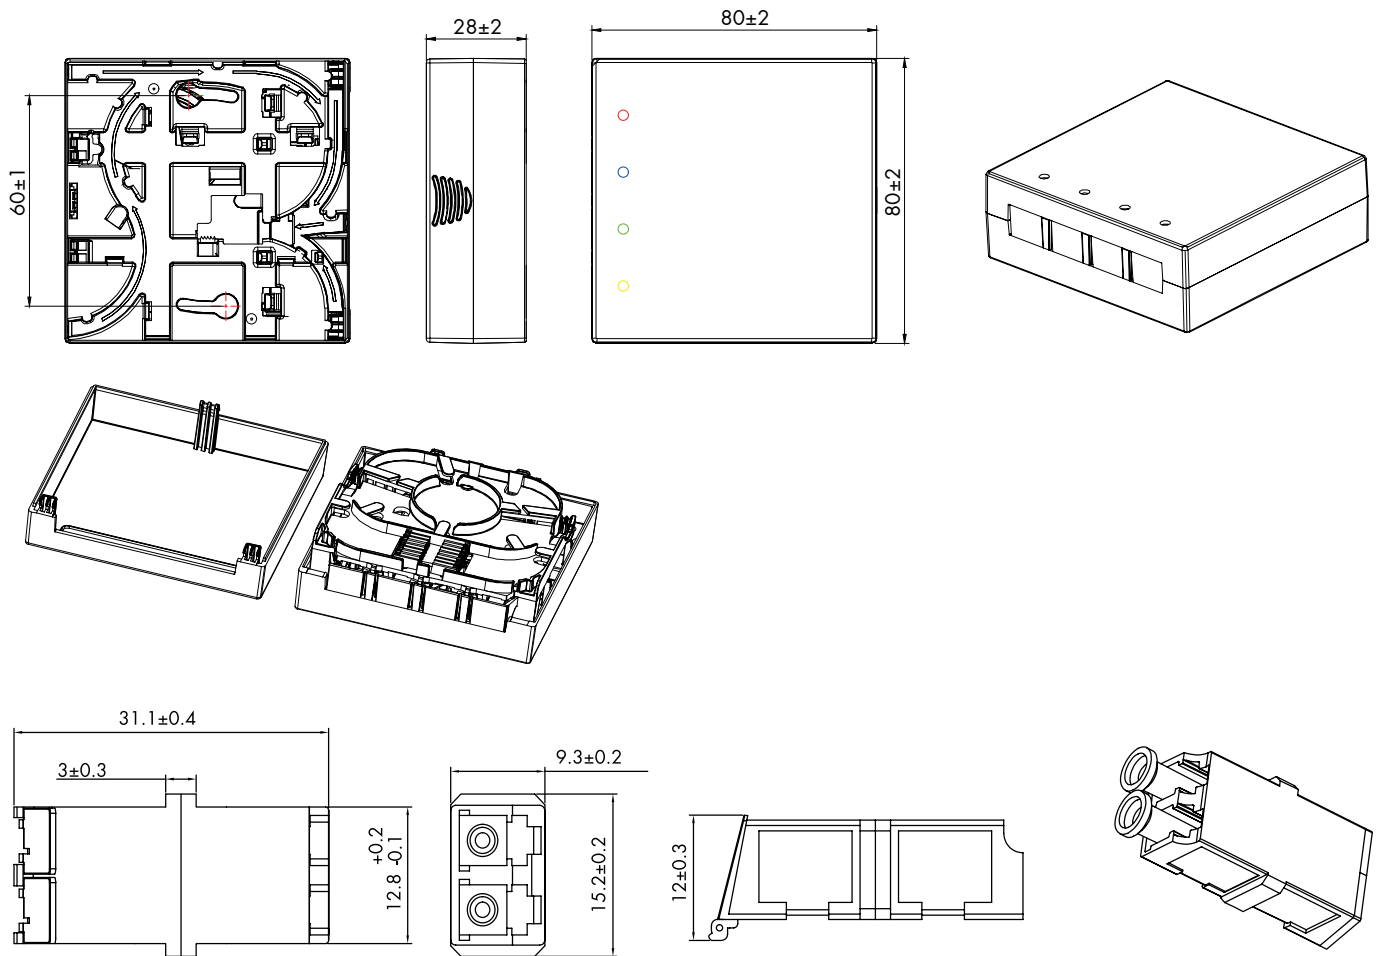

## Package Content

1x FTTH Termination Box

## Packaging Information

Art. No.	Packing Dimension	Packing Weight	Carton Q'ty	Packing Dimension	Packing Weight
FB4LC20	250 x 235 x 50 mm	0.336 kg	10 pcs	480 x 265 x 260 mm	3.86 kg
FB4LC30	250 x 235 x 50 mm	0.386 kg	10 pcs	480 x 265 x 260 mm	4.36 kg
FB4LC40	250 x 235 x 50 mm	0.432 kg	10 pcs	480 x 265 x 260 mm	4.82 kg
FB4LC50	250 x 235 x 50 mm	0.528 kg	10 pcs	480 x 265 x 260 mm	5.78 kg
FB4LC60	250 x 235 x 50 mm	0.48 kg	10 pcs	480 x 265 x 260 mm	5.3 kg