

JVS-N3022D-PoE


2MP IR Vandal Proof PoE Dome Camera



Key Features

- Resolution 1920x1080@20fps
- Waterproof IP66 Housing
- 18x IR-LED, Up to 10 Meters
- Supports CloudSEE APP on iOS/Android
- ONVIF 2.4, Compatible with ONVIF Recorder

Dimensions(mm)

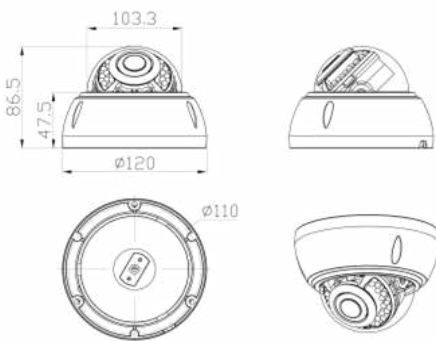

Accessory



Specifications

Video	
Image Sensor	1/ 2.7" CMOS
Max Resolution	1920 x 1080
Effective Pixels	2MP
Compression Standard	H.264
Maximum Frame Rate	1080P@20fps / 960P@25fps
SNR(dB)	55.7db
Bit Rate	Main: 261~8192Kbps Sub:87~3480Kbps
Illumination	0Lux (IR ON)
Zoom	16 x (digital zoom)
Lens	
Lens	2.8 mm / 3.6mm
Viewing Angle	2.8 mm: H 92.5°, V 59.9°, D: 108.5° 3.6 mm: H 79.6°, V 47.7°, D: 97.8°
IR-LEDs	18 LEDs
IR-Distance	Up to 20 Meters or 66 feet.
Function	
Motion Detection	Support
Email Alert	Support
Day& Night	Support
Recording	Support (NVR, Windows PC, Smartphone)
DHCP	Support
Pan/Tilt	Not Supported
Audio Input	Support (Ext. Mic)
Audio Codec	Support (G711A/G711U)
SD-Card	Not Supported
Privacy Mask	Support up to 8 areas
Exposure Control	Support
Image Adjustment	Support
Auto. White Balance	Support
Image Rotation	Support (Mirror/Flip)
Intercom	Not Supported
FTP	Not Supported
Network	
Ethernet	10M/100M Ethernet, RJ45 Port
Protocols	HTTP, TCP/IP,UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
Stream	2x Streams
Wi-Fi	Not Supported
LAN	Support
ONVIF	ONVIF 2.4
User	Up to 13 Users
Browser	IE8+, Chrome42
Smart Phone	iOS/Android
General	
Dimensions(W*H*D)	φ 120*90 (mm)
Weights(g)	500g
Material	Aluminum
Working Temperature	-20°C~60°C
Humidity	RH 10%~90%
Power Supply	DC12V/1.5A, PoE (IEEE 802.3af)
Consumption	Day ≦ 3W Night ≦ 7W
Waterproof	IP66
EAN	