


尺寸标注及检具说明：尺寸标有以下符号的尺寸为重点尺寸！	序号	日期	变更内容	修改者
“卡尺” “塞规” “千分尺” “高度计” “工显或影像仪” “齿轮啮合仪” “齿轮检测中心” “三次元” “其他重检项目”				

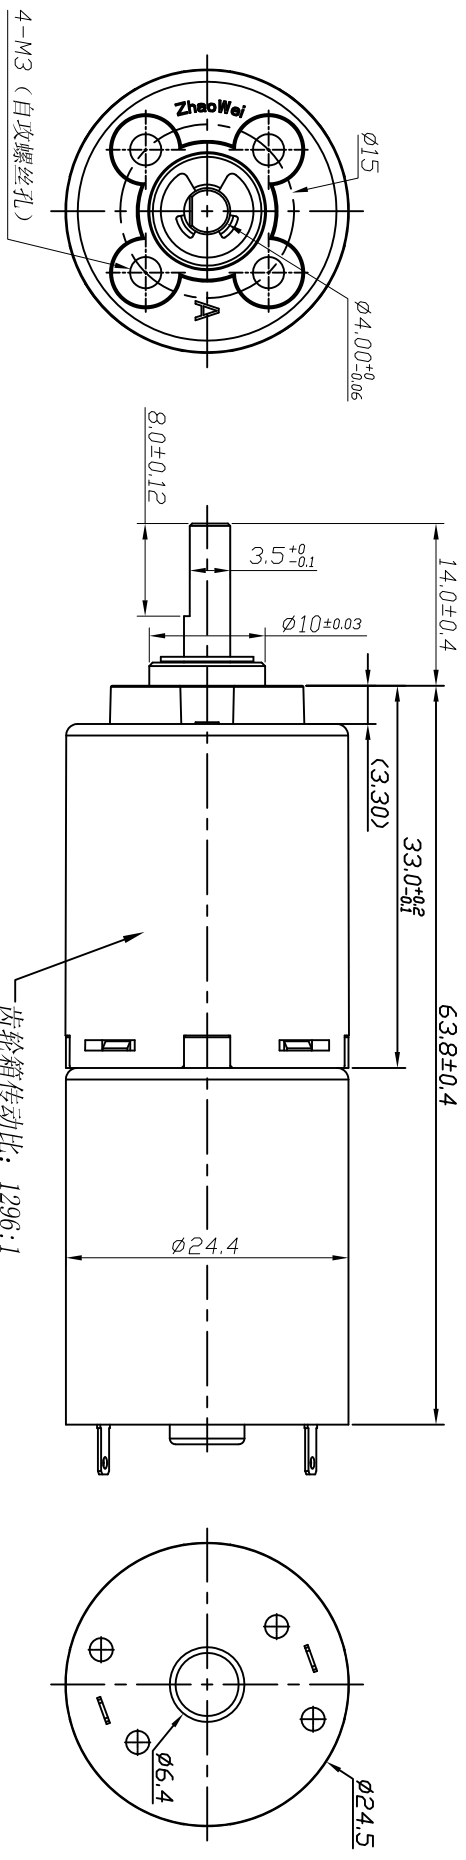

GEARBOX DATA(REF):

1	Rated Voltage	12.0 VDC	2	Idle Current	150 mA Max
3	Idle Speed	5±15% rpm	4	Rated Torque	5000g.cm
5	Rated Speed	4±15% rpm	6	Rated Current	280 mA Max
7	Permit Max Torque	6.0kg.cm	8	Idle Noise	56dB(A) Max
9	Gear Ratio	1296:1			

Noise Test Method: Detector with sponge to gearbox side 20cm in ambient noise under 32dB.

- TECHNICAL REQUIREMENTS:
- 1.No defects such as crack, scratch, burr and deformation
 - 2.No abnormal noise during testing.
 - 3.RoHS compliant.

- 技术要求:
1. 产品表面无裂纹、划痕、擦伤等缺陷。
 2. 产品测试中无异音。
 3. 环保要求：满足ROHS指令规定。

产品名称	∅21塑胶齿轮箱	未注公差	产品代码	ZMPD024024-1296															
客户名称	南 奋 勇	<table border="1"> <tr> <td>0~3</td> <td>IT 11</td> <td>IT 12</td> </tr> <tr> <td>3~6</td> <td>0.05</td> <td>0.12</td> </tr> <tr> <td>6~10</td> <td>0.11</td> <td>0.15</td> </tr> <tr> <td>10~18</td> <td>0.13</td> <td>0.21</td> </tr> <tr> <td>18~30</td> <td>0.16</td> <td>0.25</td> </tr> </table>	0~3	IT 11	IT 12	3~6	0.05	0.12	6~10	0.11	0.15	10~18	0.13	0.21	18~30	0.16	0.25	共 1 张	版本
0~3	IT 11	IT 12																	
3~6	0.05	0.12																	
6~10	0.11	0.15																	
10~18	0.13	0.21																	
18~30	0.16	0.25																	
设计	2015-03-19		第 1 张	比例															
审核				1:1															
批准																			

符合《ROHS相关禁止物质标准》

ZHAOWEI 兆威