

PC MH 125 G

Sample image

Order symbol : PC MH 125 G

Product nr : 8724319

UL Code : 8714319

UL Name : UL PC MH 125 G

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074054586

El. number :

- Finland : 3423420
- Denmark : 8212001747
- Sweden : 2536831

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

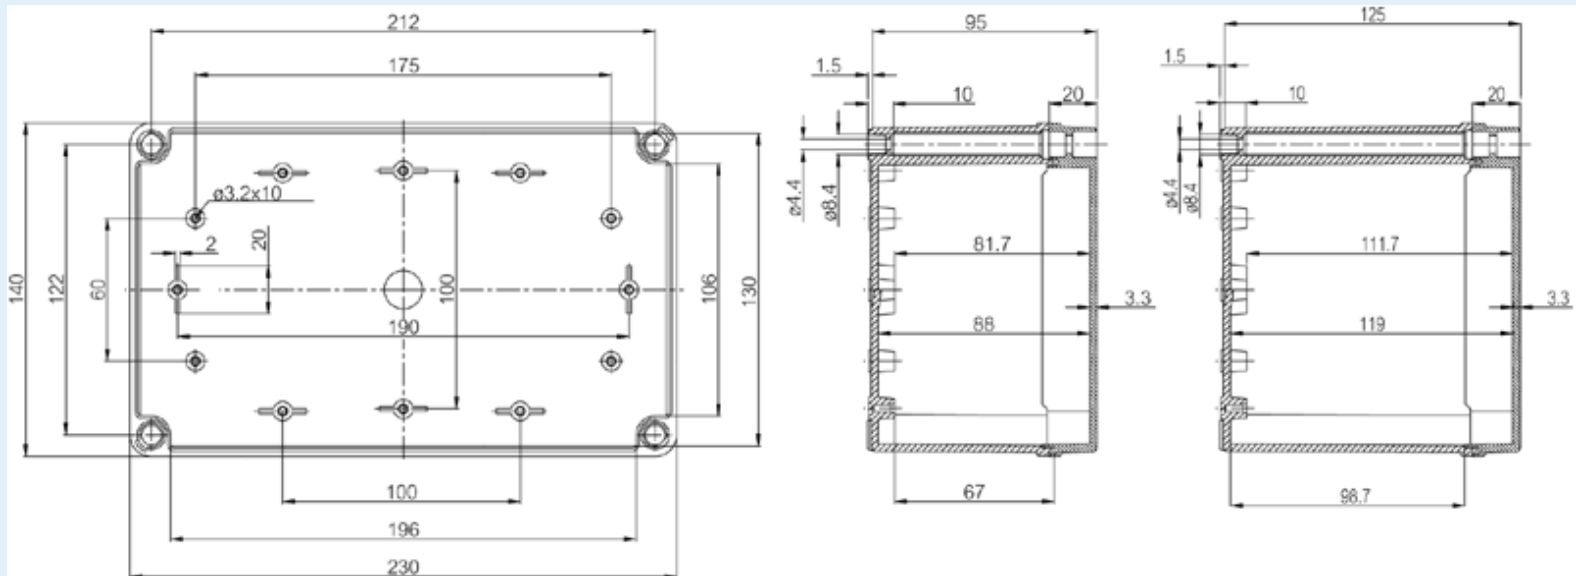

Dimensions :

	Height	Width	Depth
mm :	230	140	125
inch :	9.06	5.51	4.92

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Accessories :

CHM-3	DIN-35 Mounting rail, for enclosures: (110 x 35 x 1)
FM-3	DIN-35 Mounting rail, for enclosures: (35 x 200 x 1)
FP 22046	Wall fastening lug (4 pcs)
M-MP	Mounting plate, for enclosures: (185 x 94 x 1)

Rating :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
Electrical insulation :	Totally insulated

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	

Certificates :

SGSFIMKO_PICC_pc